

# LINEAR WALLWASHER

## LRW38H-Mono



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



### FEATURES


FINISH	6063 Aluminum
WORKING VOLTAGE	100-240V ac, 24V dc
RATED POWER	36, 48W/mtr
BEAM ANGLE	7°, 15°, 30°, 45°, 60°, 15°x60°, 20°x40°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 38(W) x 86(H)mm
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	2.4kg
LAMP LIFE	50000 hrs
BODY COLOR	Black, Grey, White, Green
CONTROL	Dmx512



### ELECTRICAL DATA

SUPPLY VOLTAGE	100-240V ac, 24V dc
COLORS	2700K, 3000K, 4000K, 5000K, 6000K
LUMEN	109.2-110.8lm/W @ 36W, 85-86lm/W @ 48W

### DIMENSION

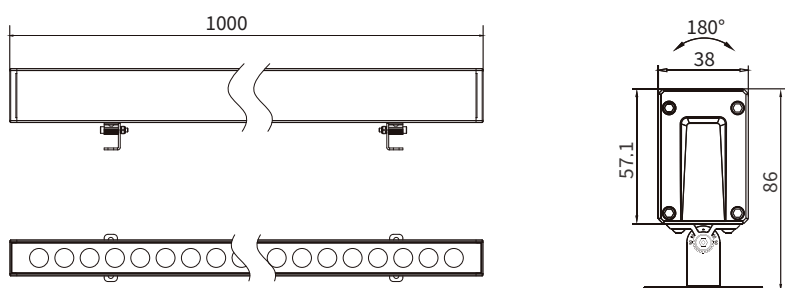

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	BODY COLOR	ACCESSORIES	CUSTOM	
LRW38H	36 - 36W	(CT27)	2700K	DC - 24V DC	7 - 7°	BK - Black	LL - Longitudinal Louvers	
		(CT30)	3000K	AC - 240V AC	15 - 15°	GR - Grey	LB - Light Baffle	
	(CT40)	4000K		30 - 30°	WH - White			
	(CT50)	5000K		45 - 45°	GN - Green			
	(CT60)	6000K		60 - 60°				
					15x60 - 15°x60°			
					20x40 - 20°x40°			

Sample: LRW38H - 36 - CT27 - DC - 7 - BK - LL - XX