

# LINEAR WALLWASHER

## LRW38H-RGB/RGBW



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



### FEATURES


FINISH	6063 Aluminum
WORKING VOLTAGE	100-240V ac, 24V dc
RATED POWER	36, 48W/mtr
BEAM ANGLE	7°, 15°, 30°, 45°, 60°, 15°x60°, 20°x40°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 38(W) x 86(H)mm
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	2.4kg
LAMP LIFE	50000 hrs
BODY COLOR	Black, Grey, White, Green
CONTROL	Dmx512



### ELECTRICAL DATA

SUPPLY VOLTAGE	100-240V ac, 24V dc
COLORS	RGB, RGBW
LUMEN	43.5-44lm/W @ 36W RGB, 48-49lm/W @ 36W RGBW 42-42.5lm/W @ 48W RGB, 48-49lm/W @ 48W RGBW

### DIMENSION

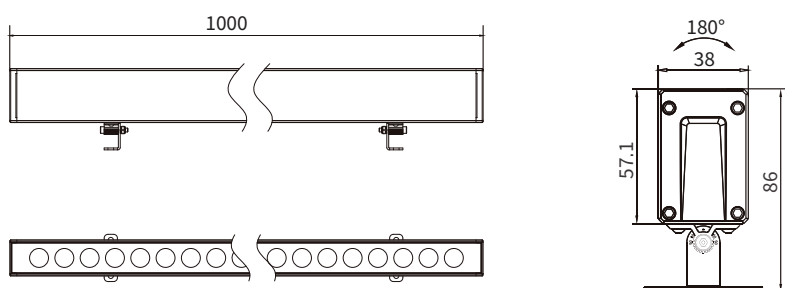

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	BODY COLOR	ACCESSORIES	CUSTOM
LRW38H	36 - 36W	(RGB)	DC - 24V DC	7° - 7°	BK - Black	LL - Longitudinal Louvers	XX - XXX
		RGB	AC - 240V AC	15° - 15°	GR - Grey		
	(RGBW)	RGBW		30° - 30°	WH - White	LB - Light Baffle	
	48 - 48W(DC)	45° - 45°		GN - Green			
	60° - 60°	15x60 - 15°x60°					
	20x40 - 20°x40°						

Sample: LRW38H - 36 - RGB - DC - 7 - BK - LL - XX