

LINEAR WALLWASHER

LRW40-Mono



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



FEATURES


FINISH	6063 Aluminum
WORKING VOLTAGE	220V ~ 50/60Hz AC
RATED POWER	40W/mtr
BEAM ANGLE	15°, 30°, 45°, 15°x60°, 20°x40°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 65(W) x 110(H)mm
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	3.5kg
LAMP LIFE	50,000 hrs
BODY COLOR	Black, Grey, White, Green
CONTROL	Dmx512



ELECTRICAL DATA

SUPPLY VOLTAGE	220V ac
COLORS	2700K, 3000K, 4000K, 5000K, 5700K
LUMEN	85~90lm/W

DIMENSION

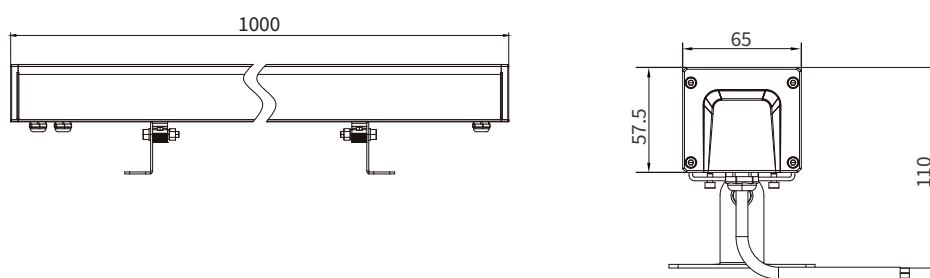

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	BODY COLOR	CUSTOM
LRW40	40 - 40W	(CT27)	AC - 220V AC	15° - 15°	BK - Black	XX - XXX
		(CT30)		30° - 30°	GR - Grey	
		(CT40)		45° - 45°	WH - White	
		(CT50)		15x60° - 15°x60°	GN - Green	
		(CT57)		20x40° - 20°x40°		

Sample: LRW40 - 40 - CT27 - AC -15 - BK - XX