

HERMETIC 3

HMT 3

Mono IP20 CE

YYZ Hermetic is a tough and corrosion resistant surface/suspended mounted weatherproof luminaire suitable for high humidity areas or exterior mounting under a canopy or covered environment. It provides better wide-beam light distribution for straight forward and effective lighting. This fixture is equipped with stainless steel tamper resistant clips with IP66 rating makes it preferred solution for car parks, back of house, warehouse applications, etc.



FEATURES

HOUSING	RAL 7035 Light grey polycarbonate
FINISH	White polycarbonate
RATED POWER	17W, 25W, 32W, 50W, 60W
WORKING VOLTAGE	220-240V ac 50/60Hz
BEAM ANGLE	120°
MOUNTING	Surface mounted
LAMP LIFE	50,000 hrs
AMBIENT TEMPERATURE	-20° C - +50° C
CONTROL	On-Off, 1-10V, Dali
LUMEN	125 lm/W
OPTIC	Polycarbonate diffuser

CREE
LED Quality



200-240VAC
Working Voltage

17W/25W/32W/50W/60W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	17W, 25W, 32W, 50W, 60W
SUPPLY VOLTAGE	200-240V ac 50/60Hz
CCT	3000K, 4000K, 5000K
CRI	80+

DIMENSION

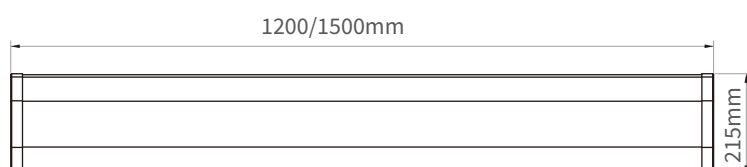

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FIXTURE SIZE - L x W x H
HMT 3	17 - 17W	(CT30) 3000K	ND - Non-Dimmable	120 - 1200 x 215 x 77mm(17W, 32W)
	25 - 25W	(CT40) 4000K	AN - 1-10V	150 - 1500 x 215 x 77mm(25, 50, 60W)
	32 - 32W	(CT50) 5000K	DA - Dali	
	50 - 50W			
	60 - 60W			

Sample: HMT3 - 17 - CT30 - ND - 120