

# DOME SERIES

## DOE-R200

**Mono** IP54 CE

YYZ Dome series of architectural downlight features glare free performance with the ultra wide beam angle. Available in variety of sizes to accommodate wattage. Making it versatile for applications with ceiling heights.



### FEATURES

MATERIAL	Aluminum
FINISH	White
RATED POWER	25W, 38W, 52W
WORKING CURRENT	700mA, 1050mA, 1400mA
RADIANCE ANGLE	18°, 30°, 60°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø216 x 131mm (Cutout Ø200mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	Non-Dim, 1-10V, Dali

CITIZEN  
LED Quality


700mA/1050mA/1400mA  
Working Current

25W/38W/52W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	25W, 38W, 52W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	80, 90
LUMEN	2800-3400lm @ 25W, 3900-4600lm@ 38W, 4800-5600lm@ 52W

### DIMENSIONS

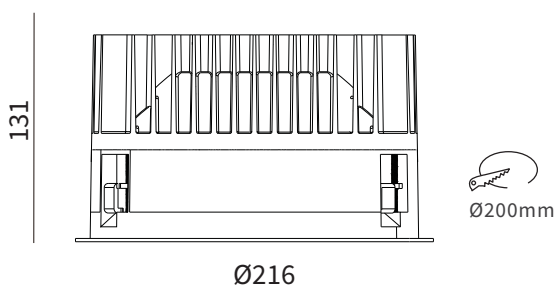

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	BEAM ANGLE	FINISH	REFLECTOR FINISH
DOE R 200	25 - 25W	(CT27) 2700K	18 - 18°	WH - White	MA - Matt
	38 - 38W	(CT30) 3000K	30 - 30°	XX - Custom	WH - White
	52 - 52W	(CT40) 4000K	60 - 60°		BK - Black

Sample: DOE R 200 - 25 - CT27 - 18 - WH - MA