

IVORY E SERIES

IVY-E

Mono IP54 CE

YYZ Ivory E series of architectural downlight features glare free performance with UGR ≤ 17. Available in variety of sizes and wattages.



FEATURES



MATERIAL	Die-cast aluminum
FINISH	White, Black
RATED POWER	10W, 18W, 24W
WORKING CURRENT	250mA, 500mA
RADIANCE ANGLE	15°, 24°, 36°, 50°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø140 x 75mm (Cutout Ø120-125mm)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Dali
MacAdam	3SDCM(Standard), 2SDCM(On request)

- OSRAM LED Quality
- 250mA, 500mA Working Current
- 10W/18W/24W Rated power

ELECTRICAL DATA

POWER CONSUMPTION	10W, 18W, 24W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K
CRI	92
LUMEN	120lm/W

DIMENSIONS

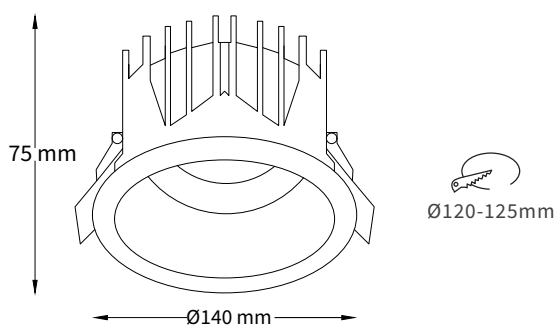

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAM ANGLE	FINISH	REFLECTOR FINISH	CUSTOM	
IVY-E	10 - 10W	(CT27)	2700K	SW - On/Off	15 - 15°	BK - Black	BK - Black	XX - Custom
	18 - 18W	(CT30)	3000K	DA - Dali	24 - 24°	WH - White	WH - White	
	24 - 24W	(CT40)	4000K		36 - 36°	XX - Custom		
					50 - 50°			

Sample: IVY-E - 10 - CT27 - SW - 15 - BK - BK - XX