

# SMDLCH SURFACE MOUNTED LIGHT

## SMDLCH-3089-13

**Mono** IP65 CE

YYZ SMDLCH is surface mounted LED downlight is with symmetric light distribution to achieve an effective task, accent or ambient lighting. These downlights are also suitable for all commercial lighting applications as well as public indoor space where there is limited space in ceiling. It is available in white and black finishes.



### FEATURES

MATERIAL	Aluminum
FINISH	White, Black
WORKING CURRENT	350mA
RATED POWER	13W
BEAM ANGLE	18°, 28°, 39°
LAMP LIFE	50,000 hrs
MOUNTING	Surface mounted
CONNECTION	Indoor rated connection
DIMENSIONS	81 x 81x106mm
OPERATION TEMP	-30° C - +50° C
CONTROL	Triac, 1-10V, Dali

BRIDGELUX  
LED Quality


350mA  
Working Current

13W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	13W
SUPPLY VOLTAGE	220-240Vac
COLORS	2700K, 3000K, 4000K
CRI	90
LUMEN	61 lm/W

### DIMENSIONS

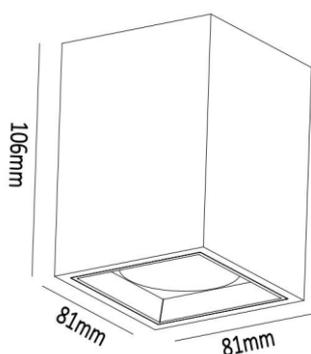

### ORDERING LOGIC

PRODUCT	WATTAGE	BEAM ANGLE	COLOR TEMPERATURE	CURRENT	FINISH	CUSTOM
SMDLCH-3089-13	13 - 13W	18 - 18°	(CT27) 2700K	350 - 350mA	WH - White	XX - XXXX
		28 - 28°	(CT30) 3000K		BK - Black	
		39 - 39°	(CT40) 4000K			

Sample: SMDLCH-3089-13 - 13 - 18 - CT 27 - 350 - WH - XX