

VERTEX K22

VTX K22



YYZ Vertex K22 series high brightness and easy installation for architectural outdoor solution, used milky diffuse cover and alum end cap, build in DMX512 module and auto-programming. The modular system available in 600mm, 900mm or 1200mm lengths and can be customized as per project's requirement Two installation way can be selected, mounting clip and adjustable brackets. All cables can be hidden into channel, IP67-rated, UV resistant and designed to withstand outdoor element, applicable for various architectural environment.



FEATURES


LIGHT SOURCE	5050 Led
LED QUANTITY	48 Leds / mtr
FINISH	Aluminum
WORKING VOLTAGE	24 V dc
RATED POWER	7W, 12W/mtr
RADIANCE ANGLE	120°
DIFFUSER	Milky
LAMP LIFE	50,000 hrs
MOUNTING	Mounting clip / Adjustable bracket
CONNECTION	Outdoor rated connections
DIMENSIONS	600, 900, 1000(L) x 24.4(W) x 44.7(H)
MAX DAISY RUN	12 mtr max daisy chain
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +70° C
CONTROL	On/Off



ELECTRICAL DATA

POWER CONSUMPTION	7W, 12W/mtr
SUPPLY VOLTAGE	24 V dc
SUPPLY CURRENT	240V ac
COLORS	2700K, 3000K, 4000K, 5700K
CRI	80+
LEDS / 3.3FT	48

DIMENSION

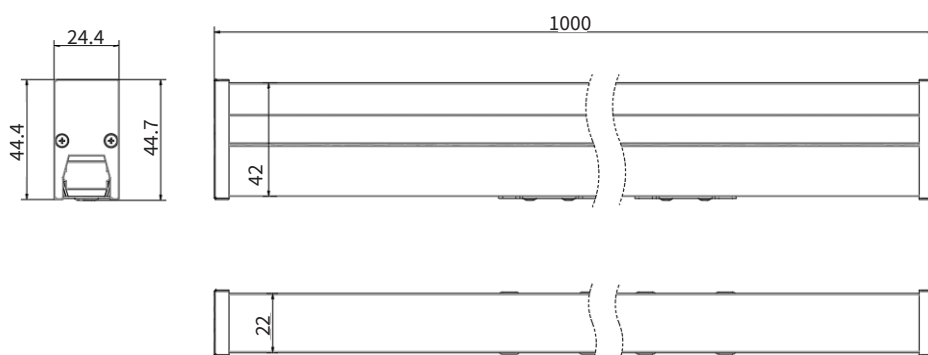

ORDERING LOGIC

PRODUCT	POWER	CONTROL	COLOR TEMPERATURE	VOLTAGE	MOUNTING	CONNECTION	CUSTOM
VTX K22	7 - 7W 15 - 15W	SW - On/Off	(CT27) 2700K (CT30) 3000K (CT40) 4000K (CT57) 5700K	24 (24 Vdc)	CL - Clip AB - Adjustable Bracket	OC - Outdoor Connector	xx

Sample: VTX K22 - 15 - SW - CT27 - 24 - CL - OC - XX