

CORAL

CRL-R

Mono IP54 CE

YYZ Coral downlights are specially designed for wet area applications like jacuzzi, toilets, balcony, exterior entrance that demands water proof construction and resistance to corrosion. Wide range of beam angle to cater to application specific requirements. Powered by high efficiency COB LED chip with its consistent performance ensured through a reliable heat sink.


FEATURES

BODY	Die-cast aluminum
FINISH	White, Black, Silver
WORKING VOLTAGE	100-240V 50/60Hz
RATED POWER	15W
RADIANCE ANGLE	16°, 24°, 38°
LAMP LIFE	50,000 hrs
MOUNTING	Ceiling recessed
DIMENSIONS	Ø134x145mm(Cutout Ø128mm)
OPERATION TEMP	-30° C - +50° C
CONTROL	Dali, 0-10V, Triac

ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	100-240Vac
COLORS	2700K, 3000K, 4000K, 5000K
CRI	90
LUMEN	90lm/W

DIMENSIONS

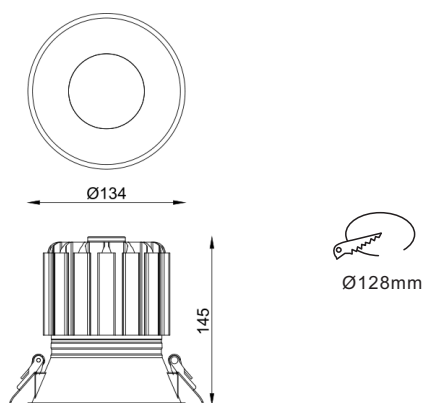

- CREE LED Quality
- 240 V AC Working Voltage
- 15W Rated power

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	
CRL-R	15 - 15W	(CT27)	2700K	AC - 240VAC	16° - 16°	WH - White
		(CT30)	3000K		24° - 24°	BK - Black
		(CT40)	4000K		38° - 38°	SL - Silver
		(CT50)	5000K			

Sample: CRL-R - 15 - CT27 - AC - 15 - WH