

LINEAR FLEX WASHER SIDE BENDING

LFW-SB



YYZ LFW wall washer performs to give the ideal solution in achieving a flawless wall washing effect. Streamlined design with highly focussed and direction beam from a PMMA lens with silicone encapsulation. Backed with high quality aluminium profile for thermal management and adjustable brackets for effective installation. Modular system available in standard lengths and can be customized as per project requirements. IP67 structural waterproof making it desirable for a wide range of applications like wall grazing, linear and indirect illumination for exterior architectural, retail and hospitality applications.



FEATURES


| | |
|------------------|-------------------------|
| WORKING VOLTAGE | 24 Volts |
| RATED POWER | 19.2W/mtr |
| BEAM ANGLE | 20°/30°/40°/55°/25°x40° |
| AVAILABLE LENGTH | 5mtr reel |
| MOUNTING | Surface mounting, Clip |
| DIMENSIONS | 23x11mm |
| OPERATION TEMP | -40° C - +50° C |
| LAMP LIFE | 50,000 hrs |




ELECTRICAL DATA

| | |
|-------------------|-----------------------------------|
| POWER CONSUMPTION | 19.2W/mtr |
| SUPPLY VOLTAGE | 24 DC Volts |
| COLORS | 2500K, 2700K, 3000K, 4000K, 6000K |
| CRI | 80+ |

DIMENSION

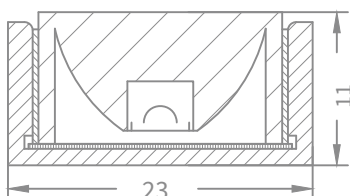

BENDING DETAIL

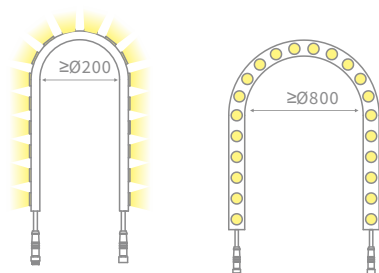

ORDERING LOGIC

| PRODUCT | OPTIC | COLOR TEMPARTURE | VOLTAGE | CABLE ENTRY | CUSTOM |
|---------|-----------------|-------------------------------|------------|-------------|--------|
| LFW-SB | 20 - 20° | (CT25) 2500K | 24 - 24VDC | ED - End | XX |
| | 30 - 30° | (CT27) 2700K | | LF - Left | |
| | 40 - 40° | (CT30) 3000K | | RH - Right | |
| | 55 - 55° | (CT40) 4000K | | | |
| | 25x40 - 25°x40° | (CT60) 6000K (CTXX) CUSTOM | | | |

Sample: LFW-SB - 20 - CT 25 - 24 - ED - XX