

# ATRIUM IP RECESSED

## ATR IP-R IP54, IP65

Atrium IP series luminaires are designed for demanding clean room environments like food processing, professional kitchen areas, hospital environments etc. Body constructed in sheet steel powder coated to white RAL 9016. Options of Tp(a) & Tp(b) diffusers and tempered glass to suit application requirements. Wide range of ceiling compatibility to suit various types of ceilings.



### FEATURES

MATERIAL	CRCA Sheet Steel
FINISH	White Epoxy polyester powder coated in white(RAL 9016)
RATED POWER	30W, 34W, 36W, 40W, 50W, 60W, 75W
WORKING VOLTAGE	220-240V AC
RADIANCE ANGLE	180°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	L70,B20 50,000 hours
DIMENSION	595mm x 595mm x 85mm, 1195x295x85mm, 1195x595x85mm ( Lay-in), 599mm x599mm x 85mm, 1199x299x85mm, 1199x599x85mm (Dampa)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Dali, 1-10V, Emergency Kit

**SAMSUNG/LUMILEDS**  
LED Quality


**220-240VAC**  
Working Voltage

**30W/34W/36W/40W/50W/60W/75W**  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	30W, 34W, 36W, 40W, 50W, 60W, 75W
SUPPLY VOLTAGE	220-240V AC
COLORS	3000K/4000K/6500K
CRI	>80
DELIVERED LUMENS	120lm/W
SDCM	3SDCM, 2SDCM (on request)

### DIMENSIONS

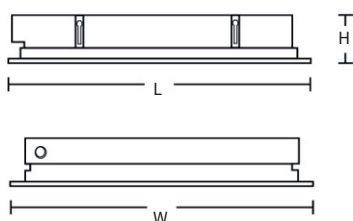

LAY-IN/GYPSUM CEILING			GYPSUM	METAL CEILING		
L	W	H	CUT-OUT	L	W	H
595	595	85	570X570	599	599	85
1195	295	85	1170X270	1199	299	85
1195	595	85	1170X570	1199	599	85

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	INPUT VOLTAGE	FINISH	CONTROL	DIFFUSER	SIZE - L x W	IP RATING
ATR IP-R	30 - 30W	(CT 30) 3000K	220-240VAC	WH - White	SW - On/Off	A - Tp(a)	A - 595x595	54 - IP54
	34 - 34W	(CT 40) 4000K		XX - Custom	DA - Dali	B - Tp(b)	B - 1195x295	65 - IP65
	36 - 36W	(CT 65) 6500K			AN - 1-10V	G - Tempered Glass	C - 1195x595	
	40 - 40W	(CTXX) CUSTOM			EM - Emergency Kit		D - 599x599	
	50 - 50W						E - 1199x299	
	60 - 60W						F - 1199x599	
	75 - 75W							

Sample: ATR IP-R - 30 - CT30 - 220 - WH - SW - A - A - 54