

# LED FLOOD LIGHT-Mono

## LFL-72



YYZ LFL series is a ground mounted luminaire in power LED version providing precision optical systems which gives very low glare rating, while reducing light pollution and specially designed for landscapes and in unique structural design shape. These luminaires are designed to offer functional, a wide range of lighting solutions and dramatic highlighting of the architectural facades, landscapes, trees through the superior finishing as well highest efficiency with a long service life. This exterior ground spike luminaires are made in aluminum body and can achieve the desired effect in a wide range of applications with high quality optical systems and for direct lighting. These are mainly used in outdoor landscape, building advertising, inside or outside of building wall, huge architecture, huge bridge guardrail.



### FEATURES

MATERIAL	Aluminum
FINISH	Black /Grey/White
RATED POWER	72W
WORKING VOLTAGE	100~240V AC, 50/60Hz
BEAM ANGLE	5.5°/8°/15°/30°/40°/60°/80°/30x60°/120x60°
MOUNTING	Surfacemount
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	274.7 x 200 x 225 mm
OPERATION TEMP	-35° C - +50° C
STORAGE TEMP	-20° C - +50° C
CONTROL	On/Off, Dmx

CREE/NICHIA/OSRAM/LUMILEDS  
LED Quality


100~240VAC  
Working Voltage

72W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	72W
SUPPLY VOLTAGE	24 Vdc/240Vac
CRI	80+
COLORS	2700K, 3000K, 4000K, 5000K, 5700K, 6500K
LUMEN	5760lm @4000K

### DRAWING

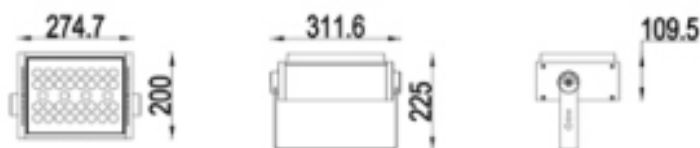

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	INPUT VOLTAGE	OPTIC	FINISH	CONTROL	ACCESSORIES
LFL-72	72 - 72W	(CT27) 2700K	AC - 100~240VAC	5.5 - 5.5°	BK - Black	SW - ON/OFF	XX - XXX
		(CT30) 3000K		8 - 8°	GR - Grey	DM - DMX	
		(CT40) 4000K		15 - 15°	WH - White		
		(CT50) 5000K		30 - 30°			
		(CT57) 5700K		40 - 40°			
		(CT65) 6500K		60 - 60°			
				80 - 80°			
				30x60 - 30° x 60°			
			120x60 - 120° x 60°				

Sample: LFL-72-72-CT27-AC-5.5-BK-SW-XX