

WALLWASHER LWO SERIES



LWO-54D



IP66
WATER
PROOF



YYZ LWO series linear light is a new solution of large scale high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



FEATURES

FINISH	Anodized or Powder coated
WORKING VOLTAGE	220VAC
RATED POWER	12W (300mm), 24W (600mm), 36W, 48W (900mm) 48W, 54W (1200mm)
BEAM ANGLE	120°
AVAILABLE LENGTH	300mm, 600mm, 900mm, 1200mm
MOUNTING	Surface mounting
OPTIC	P C Diffused
DIMENSIONS	300, 600, 900, 1200(L) x 47.6(W) x 76.55mm(H)
OPERATION TEMP	-30° C - +45° C
STORAGE TEMP	-30° C - +45° C
LAMP LIFE	50000 hrs
BODY COLOR	Anodized or powder coated
CONTROL	On/Off, Dali, 1-10V, Dmx

CREE / OSRAM
LED Quality


220V AC
Working Voltage

**12W(300mm), 24W(600mm),
36W, 48W(900mm), 48W, 54W(1200mm)**
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	12W (300mm), 24W (600mm), 36W, 48W (900mm) 48W, 54W (1200mm)
COLORS	2700K, 3000K, 4000K, 5000K, 6500K, RGB, RGBW
CRI	80+
LUMEN	65-80lm/W

DIMENSION

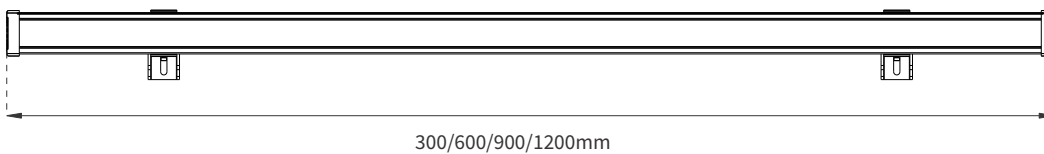

ORDERING LOGIC

PRODUCT	WATTAGE		OPTIC		COLOR TEMPARTURE		VOLTAGE	FIXTURE LENGTH		CUSTOM	
LWO-54D	12	12W(300mm)	120	120°	(CT27)	2700K	AC - 220VAC	30	-	300mm	XX
	24	24W(600mm)			(CT30)	3000K		60	-	600mm	
	36	36W(900mm)	(CT40)	4000K	90	-	900mm				
	48	48W(900mm)	(CT50)	5000K	120	-	1200mm				
	54	48W(1200mm)	(CT65)	6500K							
		54W(1200mm)	(RGB)	RGB							
				(RGBW)	RGBW						

Sample: LWO-54D - 12 - 120 - CT 27 - AC - 30 - XX