

# PANDORA MAGNETIC TRACK LIGHT

## PDA

**Mono** IP40 CE

Pandora series of Track light features a family of attachments to meet diverse lighting requirements. Tools free magnetic insets includes spotlight, cylindrical & circular pendants, wall wash spot, linear downlight and diffused lights. Preferred choice for wide range of commercial, architectural and hospitality spaces.



### FEATURES

MATERIAL	Aluminum + PC
BODY FINISH	Black
RATED POWER	15W
BEAM ANGLE	10°, 24°, 38°
VOLTAGE	220-240VAC, 50/60Hz
MOUNTING	Track mounted
DIMENSIONS	Ø56x150mm
OPERATION TEMP	-20° C - +50° C
CONTROL	On/Off, Dali, 1-10V


BRIDGELUX  
LED Quality

**W** 15W  
Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	15W
SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 4000K, 5000K
CRI	90
LUMEN	85lm/W

### DIMENSIONS

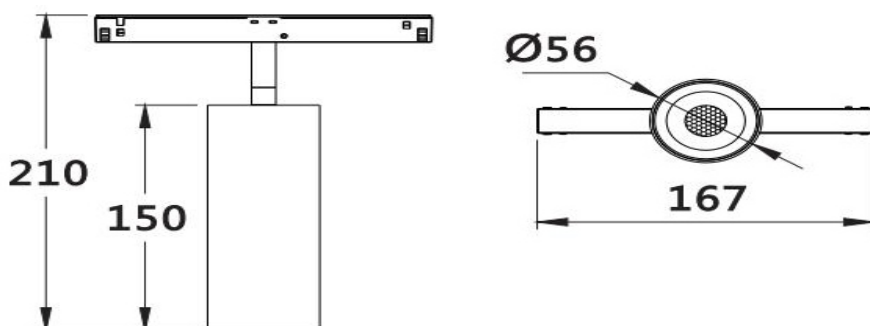

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAMANGLE	FINISH	CUSTOM	
PDA	15 - 15W	(CT27)	2700K	ND - Non Dimmable	10 - 10°	BK - Black	XX - XX
		(CT30)	3000K	DA - Dali	24 - 24°		
		(CT40)	4000K	AN - 1-10V	38 - 38°		
		(CT50)	5000K				

Sample: PDA - 15 - CT27 - ND - 10 - BK - XX