

# LIMO 8

## LMO 8

Mono IP66 CE

YYZ Limo series are designed for wall mounted application with beam up/down or one sided, Constructed in die-cast aluminium, with rugged IP65 rating makes it suited for indoor/outdoor rated applications. Options of beam angles to suit the application area.



### FEATURES

HOUSING	Die-cast aluminum
WORKING VOLTAGE	220-240V AC
MOUNTING	Surface mounted
BEAM ANGLE	15°, 24°, 38°, 60°
DIMENSIONS	Ø86x150mm
OPERATION TEMP	-20° C - +50° C
BODY COLOR	Black, White
LAMP LIFE	50,000 hrs
CONTROL	On/Off, Triac, 0-10V, Dali

CREE/BRIDGELUX/CITILED  
LED Quality


240V AC  
Working Voltage

8W / 10W / 12W / 15W  
Rated power

### ELECTRICAL DATA

RATED POWER	8W , 10W, 12W, 15W
COLORS	2700K, 3000K, 4000K, 5000K, 6500K
CRI	90
LUMEN OUTPUT	85-95lm/W

### DIMENSION

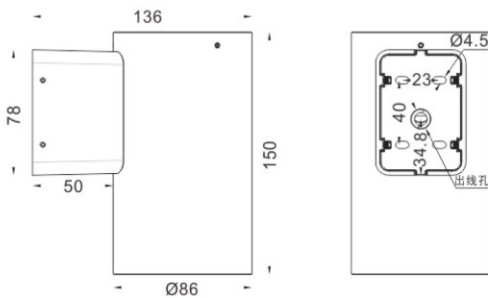

### ORDERING LOGIC

PRODUCT	WATTAGE	OPTIC	COLOR TEMPERATURE	FINISH	CUSTOM
LMO 8	8 - 8W	15 - 15°	(CT27) 2700K	BK - Black	XX - XXX
	10 - 10W	24 - 24°	(CT30) 3000K	WH - White	
	12 - 12W	38 - 38°	(CT40) 4000K		
	15 - 15W	(CT50) 5000K			
		(CT65) 6500K			

Sample: LMO 8 - 8 - 15 - CT 27 - BK - XX