

DCS

Mono IP20/IP44 **CE**

YYZ Discus series of architectural downlight features glare free performance with the ultra wide beam angle. Available in variety of sizes to accommodate wattage. Making it versatile for applications with ceiling heights.



FEATURES


BODY	Aluminum
FINISH	White ring + Grey, Ash silver
WORKING VOLTAGE	220-240V AC 50/60Hz
RATED POWER	7W, 10W, 15W, 20W, 25W, 30W, 40W
RADIANCE ANGLE	60°, 90°
LAMP LIFE	50,000 hrs
MOUNTING	Ceiling recessed
DIMENSIONS	Ø109, 145, 190, 228x52, 71, 86, 100mm(CutoutØ95, 125, 170, 210mm)
OPERATING TEMP	-20° C - +50° C

- SAMSUNG/CITIZEN/PHILIPS LED Quality
- 220-240V AC Working Voltage
- 7W/10W/15W/20W/25W/30W/40W Rated power

ELECTRICAL DATA

POWER CONSUMPTION	7W, 10W, 15W, 20W, 25W, 30W, 40W
SUPPLY VOLTAGE	220-240V AC
COLORS	2700K, 3000K, 4000K, 5000K, 6000K
CRI	80, 90
LUMEN	90-105lm/W
CONTROL	On/Off, DALI, Triac, 0-10V

DIMENSIONS

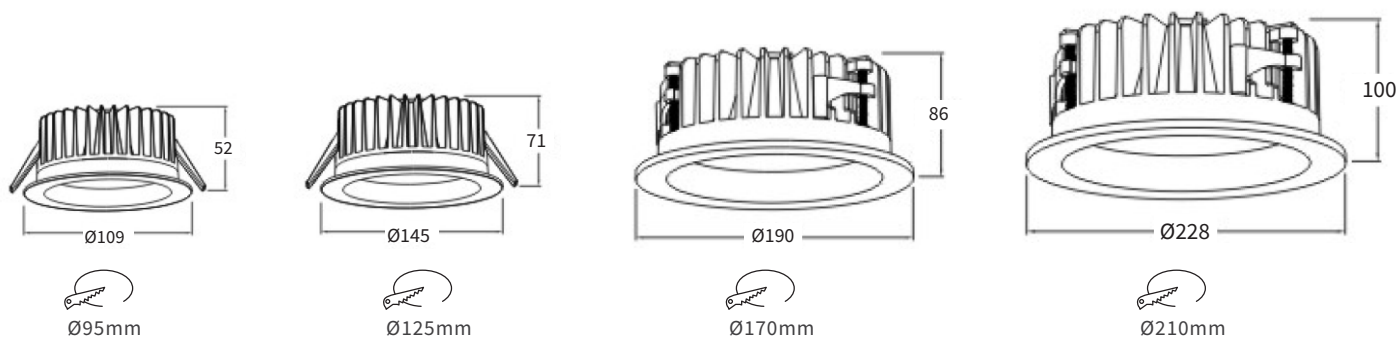

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAM ANGLE	FINISH	IP RATING	LED CHIP
DCS	7 - 7W	(CT27)	AC - 220-240V AC	60 - 60°	GR - Grey	20 - IP 20	CO - COB
	10 - 10W	(CT30)		90 - 90°	AS - Ash Silver	44 - IP 44	SM - SMD
	15 - 15W	(CT40)					
	20 - 20W	(CT50)					
	25 - 25W	(CT60)					
	30 - 30W						
	40 - 40W						

Sample: DCS - 7 - CT27 - AC - 60 - GR - 20 - CO