

# LED FLOOD LIGHT

## LFL-120S Mono

**Mono** IP66 WATER PROOF CE IK05

YYZ LFL is a unique square-shaped luminaire in power LED version providing precision optical systems which gives very low glare rating, while reducing light pollution and specially designed for landscapes and in unique structural design shape. These luminaires are designed to offer functional, a wide range of lighting solutions and dramatic highlighting of the architectural facades, landscapes, trees through the superior finishing as well highest efficiency with a long service life. This exterior ground spike luminaires are made in aluminum body and can achieve the desired effect in a wide range of applications with high quality optical systems and for direct lighting. These are mainly used in outdoor landscape, building advertising, inside or outside of building wall, huge architecture, huge bridge guardrail.



### FEATURES

MATERIAL	Anodized extruded aluminum
FINISH	Black
RATED POWER	24W
WORKING VOLTAGE	220-240V AC
LED QUANTITY	24Nos
BEAM ANGLE	12°x12°, 22°x22°, 30°x30°, 45°x45°, 15°x60°
MOUNTING	Surface mount
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	162mm(L)x151.6mm(W)x88.5mm(H)
OPERATION TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +80° C
CONTROL	On/Off, Triac, 0-10V

OSRAM LED


220-240V AC Working Voltage

24W Rated power

### ELECTRICAL DATA

POWER CONSUMPTION	24W
SUPPLY VOLTAGE	220-240 V AC
COLORS	2700K, 3000K, 4000K, 5000K, 5700K
CRI	80
LUMENS	88-98lm/W

### DRAWING

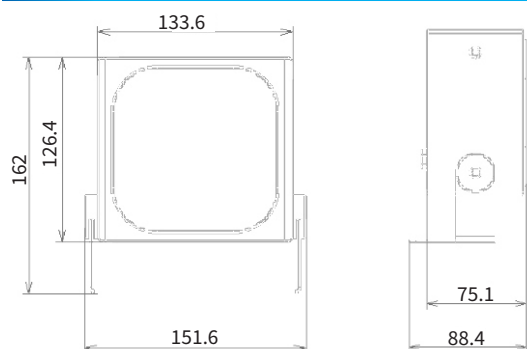

**Snoot**



**Glare barrel**

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE		OPTIC	VOLTAGE	FINISH	ACCESSORIES	CUSTOM
LFL120S	24 - 24W	(CT27)	2700K	12 - 12°x12°	AC - 220-240V AC	BK - Black	SN - Snoot	XX - XXX
		(CT30)	3000K	22 - 22°x22°			GB - Glare barrel	
		(CT40)	4000K	30 - 30°x30°				
		(CT50)	5000K	45 - 45°x45°				
		(CT57)	5700K	15x60 - 15°x60°				

Sample: LFL120S -24 - CT27 - 12 - AC - BK - SN -XX