

LED FLOOD LIGHT

LFL-140 Mono



YYZ LFL is a unique square-shaped luminaire in power LED version providing precision optical systems which gives very low glare rating, while reducing light pollution and specially designed for landscapes and in unique structural design shape. These luminaires are designed to offer functional, a wide range of lighting solutions and dramatic highlighting of the architectural facades, landscapes, trees through the superior finishing as well highest efficiency with a long service life. This exterior ground spike luminaires are made in aluminum body and can achieve the desired effect in a wide range of applications with high quality optical systems and for direct lighting. These are mainly used in outdoor landscape, building advertising, inside or outside of building wall, huge architecture, huge bridge guardrail.



FEATURES


MATERIAL	Anodized extruded aluminum
FINISH	Black
RATED POWER	45W
WORKING VOLTAGE	220 V AC
LED QUANTITY	18Nos
BEAM ANGLE	8°x8°, 20°x20°, 35°x35°, 45°x45°, 60°x60°, 15°x45°, 30°x60°
ROTATION ANGLE	360°
MOUNTING	Surface mount
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	175x145mm
OPERATION TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +80° C
CONTROL	On/Off, Triac, 0-10V

- OSRAM LED
- 24V DC Working Voltage
- 45W Rated power

ELECTRICAL DATA

POWER CONSUMPTION	45W
SUPPLY VOLTAGE	220 V AC
COLORS	2200K, 2700K, 3000K, 4000K, 5000K, 5700K
CRI	80
LUMENS	75-80lm/W

DRAWING

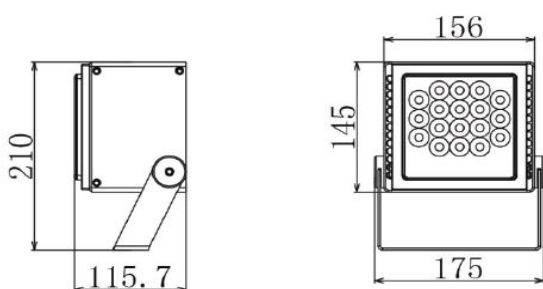

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE		OPTIC	VOLTAGE	FINISH	ACCESSORIES	CUSTOM
LFL 140	45 - 45W	(CT22)	2200K	8 - 8°x8°	AC - 220 V AC	BK - Black	AG - Anti-Glare hood	XX - XXX
		(CT27)	2700K	20 - 20°x20°				
		(CT30)	3000K	35 - 35°x35°				
		(CT40)	4000K	45 - 45°x45°				
		(CT50)	5000K	60 - 60°x60°				
		(CT57)	5700K	15x45 - 15°x45°				
				30x60 - 30°x60°				

Sample: LFL 140 - 45 - CT22 - 8 - AC - BK - AG - XX