

PRIDE

PIE 96

Mono IP44 CE

YYZ Pride recessed downlights is a perfect choice for lighting projects that require superior visual comfort, efficiency, and high quality of light with white reflector. Boasting a UGR value of less than 19, these downlights provide excellent glare control and uniformity of illumination while maintaining a high level of visual comfort. This series of LED downlights is the ideal choice for lighting projects that demand a reliable, energy efficient solution with superior visual comfort and quality of light.

FEATURES

HOUSING	Aluminum
FINISH	White, Black
RATED POWER	10W, 12W
WORKING CURRENT	800mA (10W), 350mA(12W)
RADIANCE ANGLE	15°, 30°, 50°, 60°
MOUNTING	Ceiling recessed
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø88x96mm(Cutout Ø80mm)
OPERATION TEMP	-20° C - +50° C
CONTROL	On/Off, Triac, 1-10V, Dali



CITIZEN/PHILIPS
LED Quality



800mA / 350mA
Working Current

10W/12W
Rated power

ELECTRICAL DATA

RATED POWER	10W, 12W
COLORS	2700K, 3000K, 4000K, 5000K
CRI	90+
LUMEN OUTPUT	784lm @10W, 1265lm @ 12W

DIMENSION

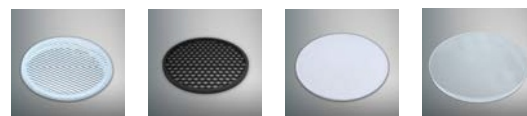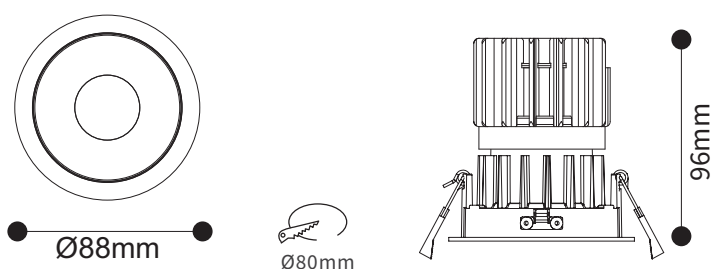

Striped glass Honeycomb louver Diffusion sheet Woven glass

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE		CURRENT	BEAM ANGLE	FINISH	ACCESSORIES
PIE 96	10 - 10W	(CT27)	2700K	800 - 800mA(10W)	15° - 15°	WH - White	SG - Striped glass
		(CT30)	3000K	350 - 350mA(12W)	30° - 30°		BK - Black
	(CT40)	4000K	50° - 50°		DS - Diffusion sheet		
	(CT50)	5000K	60° - 60°	WG - Woven glass			

Sample: PIE 96 - 10 - CT27 - 800 - 15 - WH - SG