

POLAR CEILING LIGHT

PLR

Mono IP44/IP65 **CE**

YYZ Polar series of luminaire features versatile aluminium housing, surface treated with antioxidant, thick powder coated, finished in White/Black as standard. COB led light source that delivers glare free illumination and reduced light loss.



FEATURES

MATERIAL	Aluminum
FINISH	White, Black
RATED POWER	7/10W
WORKING VOLTAGE	200-250Vac, 50Hz
BEAM ANGLE	20°/40°
MOUNTING	Pendant, Surface mounted
CONNECTION	Indoor and outdoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø75x100mm
OPERATING TEMP	-10° C - +50° C
CONTROL	On/Off

CITIZEN
LED Quality


250V AC, 50Hz
Working Voltage

7W/10W
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	7/10W
SUPPLY VOLTAGE	200-250Vac, 50Hz
COLORS	2700K, 3000K, 4000K, 5000K
CRI	80
LUMEN	90-110lm/W

DIMENSION

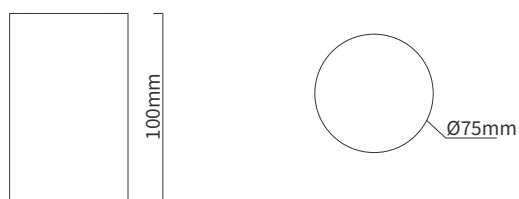

REFLECTOR



ORDERING LOGIC

PRODUCT	WATTAGE	OPTIC	COLOR TEMPERATURE	VOLTAGE	BODY COLOR	REFLECTOR COLOR	CUSTOM	
PLR	7 - 7W 10 - 10W	20 - 20° 40 - 40°	(CT 27)	2700K	AC - 250Vac	WH - White	WH - White(Standard)	XX
			(CT 30)	3000K		BK - Black	BK - Black	
			(CT 40)	4000K		MI - Mirror	MI - Mirror	
			(CT 50)	5000K		GO - Gold	GO - Gold	
						NI - Nickel	NI - Nickel	

Sample: PLR - 7 - 20 - CT27 - AC - WH - WH - XX