

LINEAR WALL GRAZER SPEC SHEET



LWG-19.2



IP20
NON-WATER
PROOF



19.2 W

Our LWG series linear wall grazer is designed to provide a smooth long throw that skims entire wall from ceiling. The extruded aluminum fixture housing that can be seamlessly installed to create a uniform distribution of light without harsh bright banding. LWG can be used for both smooth or textured wall in any interior space.

FEATURES



OPERATING VOLTAGE	24 Volts DC
OPERATING TEMPERATURE	-20°C to 60°C
LED QUANTITY	120 LEDs / mtr
FINISH	WHITE
LAMP LIFE	50,000 hrs
AVAILABLE IP RATING	IP-20
MAXIMUM DAISY CHAIN	16.4ft / 5mtr
CONTROL	Non-Dim / 0-10V Dimming / Dali Dimming
COLORS	2200K, 2400K, 2700K, 3000K, 4000K, 5000K, 6000K

ELECTRICAL DATA


POWER CONSUMPTION	19.20W/ mtr
SUPPLY VOLTAGE	24 Volts
LUMEN (3000K)	399 lm/ ft (1309 lm/ m)
RATED POWER	5.85W/ft (19.2W/m)
CRI	90

COLOR TEMPERATURE DATA

White	CT	Lumens/ft	Lumens/m
2200K	(CT 22)	331 lm	1085 lm
2400K	(CT 24)	369 lm	1211 lm
2700K	(CT 27)	384 lm	1260 lm
3000K	(CT 30)	399 lm	1309 lm
4000K	(CT 40)	408 lm	1337 lm
5000K	(CT 50)	420 lm	1379 lm
6000K	(CT 60)	410 lm	1344 lm

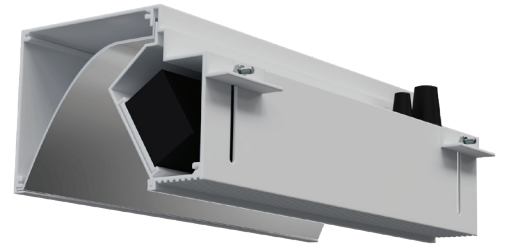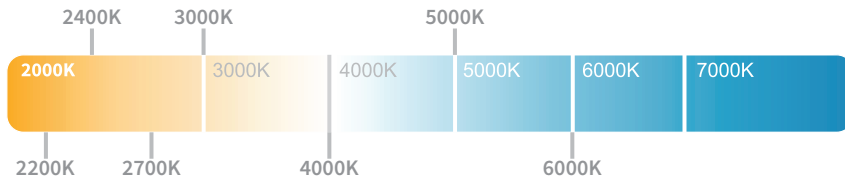


Application

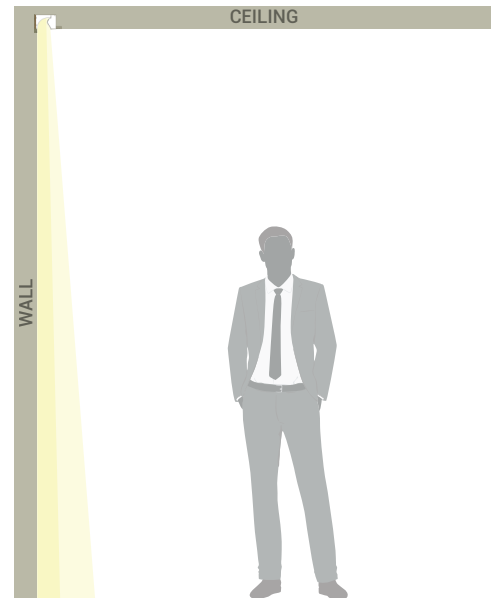

COMPONENTS

All dimensions in MM

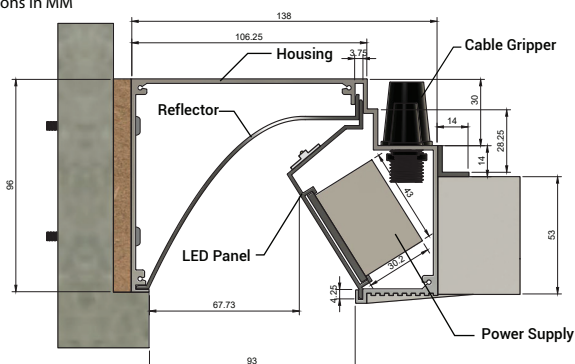

LINEAR WALL GRAZER SPEC SHEET

LWG-19.2





ORDERING LOGIC

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE	DIMMING	LENGTH	FINISH
LWG	I - INDOOR	19.2W - 19.2W/ mtr	(CT 22) 2200K	ND - NON-DIM	12 - 12inch /300mm	WH - WHITE
			(CT 24) 2400K	DIM - 0-10V	24 - 24inch /600mm	BK - BLACK
			(CT 27) 2700K	DALI - DALI	36 - 36inch /900mm	GR - GREY
			(CT 30) 3000K		48 - 48inch /1200mm	
			(CT 40) 4000K			
			(CT 50) 5000K			
			(CT 60) 6000K			

Sample: LWG-I-19.2W-CT30-DIM-12-WH

DIMENSIONS

All dimensions in MM

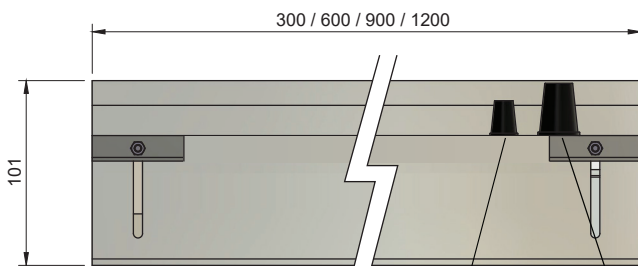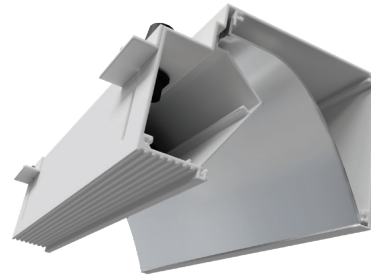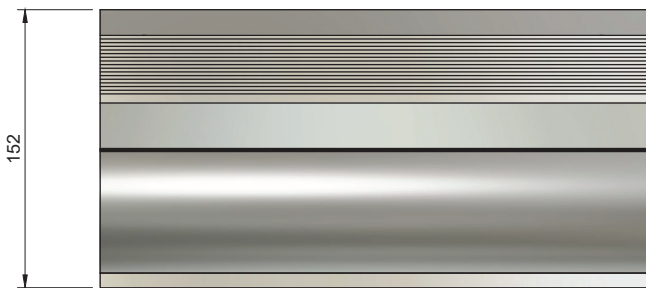

Additional cable gripper for dimming only

Cable gripper for mains power