

TUSKER NA DOWNLIGHT SPEC SHEET



TSR-NA-30W



YYZ Tusker downlight series are anti-glare architectural lighting with symmetric light distribution having UGR<16. It has beautifully shaped aluminum reflector that uses an innovative technology and is available in a variety of colors. The variety of sizes promote the power range from 7W-40W.

FEATURES


MATERIAL	Aluminum
FINISH	White, Black
IP RATING	IP44 (Suitable for damp location)
RATED POWER	30W
WORKING VOLTAGE	120V-277V
RADIANCE ANGLE	30°, 45°
UGR	UGR<16
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	Ø136 x 98 mm (Cutout Ø116 mm)
OPERATING TEMPERATURE	-20° C to +50° C (-4° F to +122° F)
CONTROL	120V 60 Hz Triac or 120V-277V 0-10V dimming
DRIVER	Class II LED Driver
WARRANTY	ETL Listed, 5 years warranty
INSTALLATION	IC Type, Easy installation with J-box (no housing needed)



ELECTRICAL DATA

POWER CONSUMPTION	30W
SUPPLY VOLTAGE	120-277 VAC
COLORS	2700K, 3000K, 4000K, 5000K, 6500K
CRI	90
EFFICACY	100 lm / W

DIMENSIONS

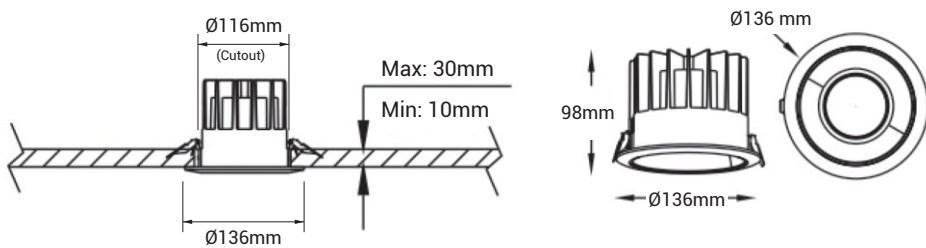

ORDERING LOGIC

PRODUCT SERIES	WATTAGE	COLOR TEMPERATURE	CRI	CONTROL	VOLTAGE	OPTICS	FINISH	REFLECTOR
TSR-NA - TUSKER North America	30 - 30W	CT 27 - 2700K	90	SW - ON/OFF	CUNV - 120-240V	30D - 30°	WH - WHITE (Standard) BK - BLACK	SL - Silver (Standard)
		CT 30 - 3000K		TRIAC - TRIAC		45D - 45°		BK - Black
		CT 40 - 4000K		DIM10 - 0-10V Dimming				GD - Gold
		CT 50 - 5000K						CG - Champagne Gold
		CT 65 - 6500K						

Sample: TSR-NA-30-CT27-90-DIM10-CUNV-30D-WH-GD