

LFX NEON SERIES

LFX-O-15W-RGBW-5050-Z5-96-24V-CV-1616-80-1-OC-N-W-T-L-N-5M



YYZ LFX Neon series is designed to provide a very bright, crisp consistent and homogenized illumination that will accentuate any building, structure, or artistic flourish. Using high brightness surface mounted LEDs, behind a first class eco-friendly UV-resistant PVC encapsulated flexible chamber material, the LFX Neon will provide your project with bright, consistent traces of light in shades of White, single colors. The fixture consists of uniform and even lighting with no Led hotspot. LFX Neon has a transverse minimum radius of 60mm. Easy to be installed, can be cut and re connected with IP67 protected connector. The product is supplied in 5m standard rolls-or custom as needed. Connectors at both ends offer ease of installation. Operating at 24V, the LFX Neon features on-board constant-current drive topology, which ensures consistent brightness along the entire run, precise drive current, and long life expectancy. Dimming is achieved with YYZ's dimming compatible power supplies.



FEATURES

LIGHT SOURCE	5050 Led
LED QUANTITY	96Leds/m
FINISH	PVC encapsulated flexible chamber material
WORKING VOLTAGE	DC 24V
RATED POWER	15W/m
RADIANCE ANGLE	120°
LAMP LIFE	50,000 hrs
MOUNTING	Mounting clip / chanel
CONNECTION	Outdoor rated connections
CUTTING INCREMENTS	67mm (1Unit)
DIMENSIONS	16mm(W) x 16mm(H)
OPERATION TEMP	-20° C - +65° C
STORAGE TEMP	-40° C - +85° C
CONTINUOUS LENGTH	5mtr

CREE/LUMILEDS
LED Quality

24 V DC
Working Voltage


15 W / mtr
Rated power

ELECTRICAL DATA

POWER CONSUMPTION	15W/m
SUPPLY VOLTAGE	DC 24 V
COLORS	RGBW
CONTROL	DMX512
CRI	80

COLOR TEMPERATURE DATA

Color	Lumens/mtr
Red (RE)	58
Green (GR)	150
Blue (BL)	37
3000K (CT 30)	144

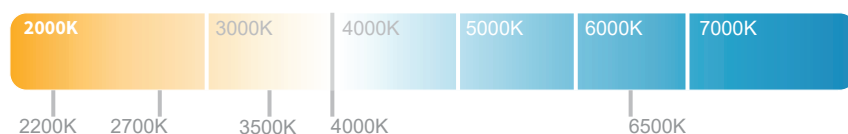

LFX NEON SERIES

LFX-O-15W-RGBW-5050-Z5-96-24V-CV-1616-80-1-OC-N-W-T-L-N-5M


ORDERING LOGIC

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	WIDTH	CRI	NO OF LED ROWS	CONNECTION
LFX	O - Outdoor (IP67)	15 - 15W	(RGBW) RGBW	5050	Z5	96 - 96 LEDs/mtr	24-24V	CV-Constant voltage	1616-16x16mm	80 - 80	1	OC - Outdoor Connector


MODEL	CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB	LENGTH PER REEL
N - Neon	W - White	T - Top (Vertical bendable)	L - Low	N - N	5M - 5mtr

Sample: LFX-O-15-RGBW-5050-Z5-96-24-CV-1616-80-1-OC-N-W-T-L-N-5M




DIMENSION

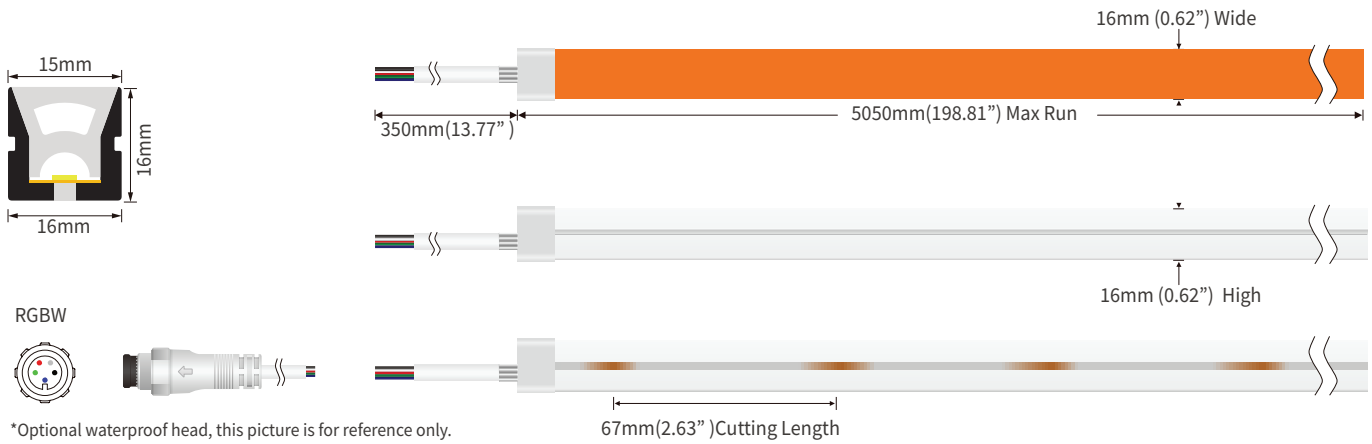

BENDING DETAILS

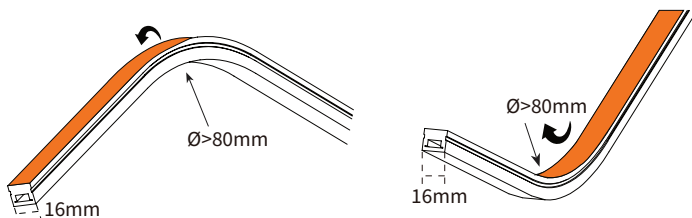

TYPES OF CABLE ENTRY

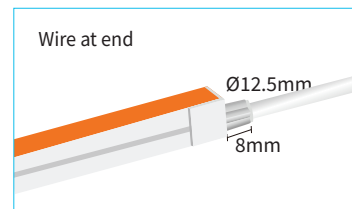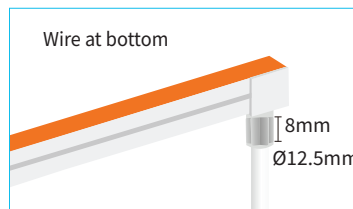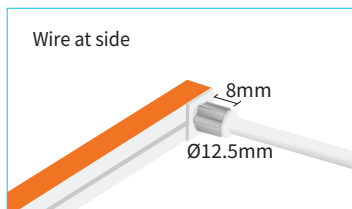

ACCESSORIES



End cap



End feeder



Side feeder



Clip