

APERTURE-40 ECO


APR40 ECO

Mono IP20 CE

YYZ Aperture 40 ECO is a surface/ suspension mounted luminaire with extruded aluminium housing, with PMMA diffuser as optic. Options of Direct/ Indirect component makes it Ideal for varied commercial spaces, particularly for office lighting applications.

FEATURES

HOUSING	Extruded architectural grade T6061 aluminium
FINISH	White, Grey, Black
BEAM ANGLE	120°
MOUNTING	Pendant, Recessed, Surface mounting
OPTIC	PMMA Milky, PMMA Black
DIMENSIONS	100x40x70mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
CONTROL	On/Off, Dali, 1-10V
LUMEN	900lm



CREE/SAMSUNG
LED Quality


240V AC
Working Voltage

30W/mtr
Rated power

ELECTRICAL DATA

RATED POWER	30W/mtr
COLORS	3000K, 4000K, 5000K
CRI	90
LUMEN	90 lm/W

DIMENSION

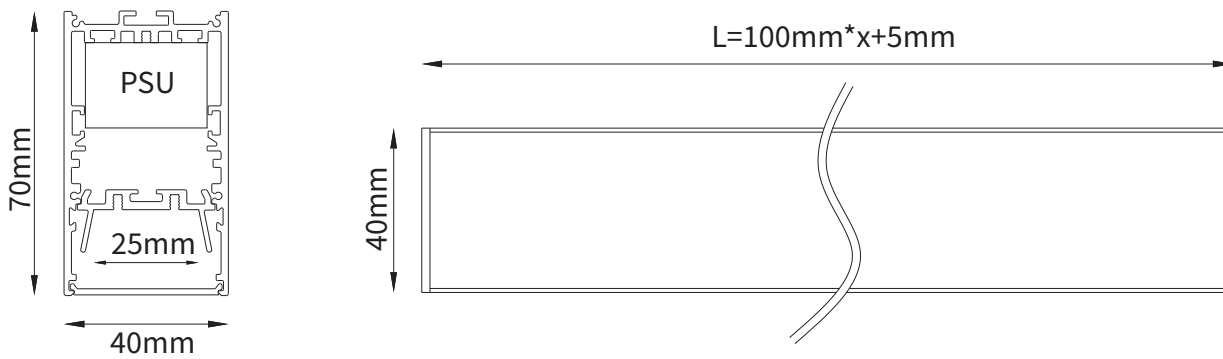

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	DRIVER	FINISH	
APR40 ECO	30 - 30W/Mtr	(CT30)	3000K	SW - ON-OFF	WH - White
		(CT40)	4000K	AN - 0-10V	BK - Black
		(CT50)	5000K	DA - DALI	GR - Grey

Sample: APR40 ECO - 30 - CT27 -SW - WH