

LINEAR WALLWASHER

LRW28C-Mono



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 600mm and 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.

FEATURES

FINISH	6063 Extruded Aluminum with Die-cast Aluminium End Caps
WORKING VOLTAGE	24V DC
RATED POWER	8W (600mm), 18W (1000mm), 24W (1000mm)
BEAM ANGLE	20°, 30°, 45°, 20°x40°
MOUNTING	Surface mounting
OPTIC	PMMA
DIMENSIONS	600/1000(L) x 28(W) x43(H)mm
OPERATION TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	0.6kg
LAMP LIFE	50,000 hrs
BODY COLOR	Aluminum
CONTROL	On/Off, DALI



- OSRAM LED Quality
- 24V DC Working Voltage
- 8W/18W/24W/mtr Rated power

ELECTRICAL DATA


SUPPLY VOLTAGE	220V AC
COLORS	2700K, 3000K, 4000K, 5000K, 5700K
CRI	80, SDCM 3

LUMENS (DELIVERED)

FIXTURE LENGTH	LUMENS (Without Micro Louver)
600mm	8W - 600 lm @ 3000°K
1000mm	18W - 1350 lm @ 3000°K
1000mm	24W - 1824 lm @ 3000°K



DIMENSION

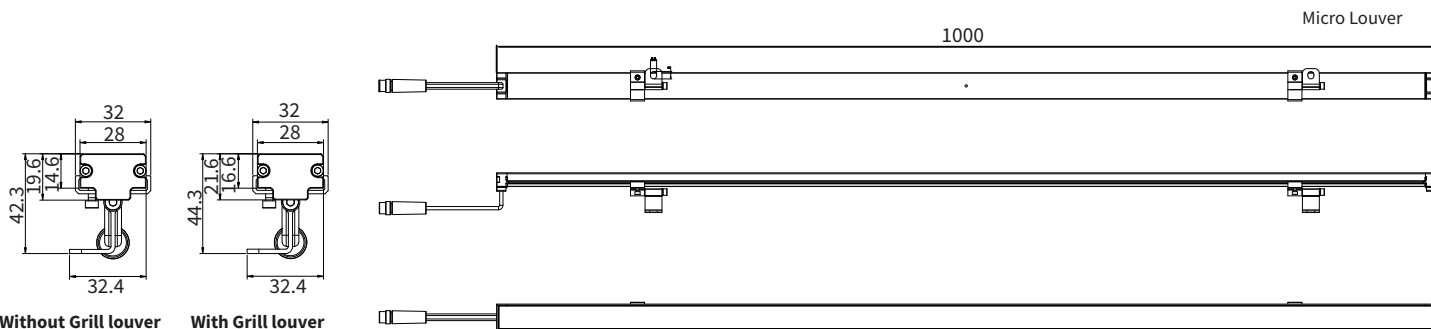

ORDERING LOGIC

PRODUCT	LENGTH	WATTAGE	COLOR TEMPERATURE	BEAMANGLE	VOLTAGE	CONTROL	FINISH	ACCESSORIES
LRW28C	1 - 600mm	8 - 8W (600mm / 12 LEDs)	(CT27) 2700K	20 - 20°	DC - 24V DC	SW - On/Off DA - DALI	AAL - Anodized Aluminium	ML - Micro Louvre
		18 - 18W (1000mm / 18 LEDs)	(CT30) 3000K	30 - 30°				BB - Baffle Blades
	2 - 1000mm	24 - 24W (1000mm / 24 LEDs)	(CT40) 4000K	45 - 45°				NA - No Accessory
		(CT50) 5000K	20x40 - 20°x40°					
		(CT57) 5700K						

Sample: LRW28C-1-8-CT27-20-DC-SW-AAL-ML