

LINEAR WALLWASHER

LRW28C-RGBW



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 600mm and 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.

FEATURES

| | |
|-----------------|---|
| FINISH | 6063 Extruded Aluminum with Die-cast Aluminium End Caps |
| WORKING VOLTAGE | 24V DC |
| RATED POWER | 12W (600mm), 18W (1000mm), 24W (1000mm) |
| BEAM ANGLE | 20°, 30°, 45°, 20°x40° |
| MOUNTING | Surface mounting |
| OPTIC | PMMA |
| DIMENSIONS | 600/1000(L) x 28(W) x 43(H)mm |
| OPERATION TEMP | -40° C - +50° C |
| STORAGE TEMP | -40° C - +80° C |
| WEIGHT | 0.6kg |
| LAMP LIFE | 50,000 hrs |
| BODY COLOR | Aluminum |
| CONTROL | DMX512 |



- OSRAM LED Quality
- 24V DC Working Voltage
- 12W/18W/24W/mtr Rated power

ELECTRICAL DATA

| | |
|----------------|---------|
| SUPPLY VOLTAGE | 220V AC |
| COLORS | RGBW |


LUMENS (DELIVERED)

| FIXTURE LENGTH | LUMENS RGBW 3000°K (Without Micro Louvers) |
|----------------|--|
| 600mm | 12W - 306 lm @ RGBW3000°K |
| 1000mm | 18W - 450 lm @ RGBW3000°K |
| 1000mm | 24W - 612 lm @ RGBW3000°K |



Micro Louver

DIMENSION

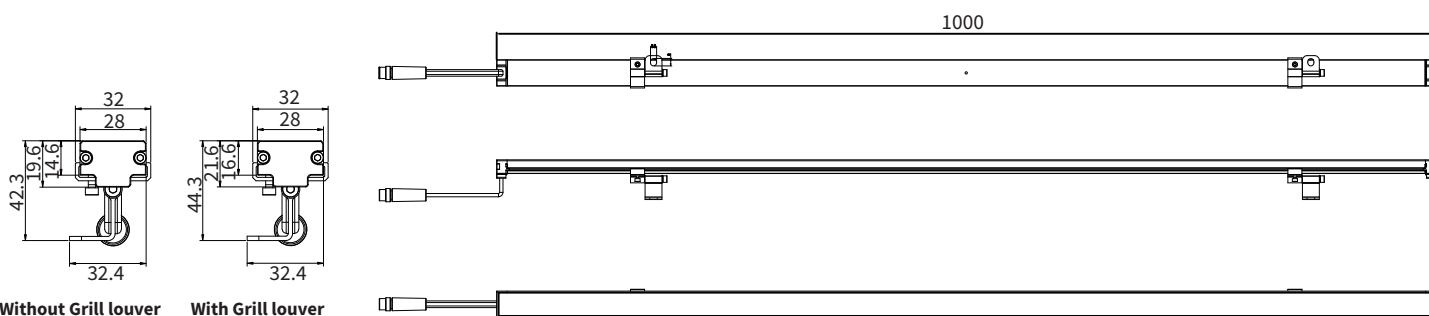

ORDERING LOGIC

| PRODUCT | LENGTH | WATTAGE | COLOR TEMPERATURE | BEAMANGLE | VOLTAGE | CONTROL | FINISH | ACCESSORIES |
|---------|------------|-----------------------------|-------------------|-----------------|-------------|--------------|--------------------------|--------------------|
| LRW28C | 1 - 600mm | 12 - 12W (600mm / 12 LEDs) | 1 RGBW3000°K | 20 - 20° | DC - 24V DC | DMX - DMX512 | AAL - Anodized Aluminium | ML - Micro Louvre |
| | 2 - 1000mm | 18 - 18W (1000mm / 18 LEDs) | 2 RGBW4000°K | 30 - 30° | | | | BB - Baffle Blades |
| | | 24 - 24W (1000mm / 24 LEDs) | 3 RGBW6500°K | 45 - 45° | | | | NA - No Accessory |
| | | | | 20x40 - 20°x40° | | | | |

Sample: LRW28C-1-12-1-20-DC-DMX-AAL-ML