

LED FLOOD LIGHT

LFL-R-60/72 RGB/RGBW




YYZ LFL-R is a type of high efficiency LED with 94% light transmittance which is combined to achieve long-distance accurate projection. The design of separate structure of the optical cavity and driver with good heat dissipation reduce the ambient temperature of driver and maintain the product components stability, thus it ensures product longer lifespan. Here we use the black light technology which means a deep-hidden anti-glare design is developed to achieve dual anti-glare purpose. This IP66 rated fixture is with 0-360° rotatable rackets, precisely adjustable dial, and safety self-locking structure design. These lights are mainly used in outdoor landscape, building advertising, inside or outside of building, etc.



FEATURES

MATERIAL	Aluminum
FINISH	White/Black /Grey
RATED POWER	60, 72W
WORKING VOLTAGE	220 - 240V AC
LED QUANTITY	30 Nos
BEAM ANGLE	8°/15°/30°/45°/60°/15°x60°/20°x40°
MOUNTING	Surface mount
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø220x251.5mm
OPERATION TEMP	-40° C - +50° C
STORAGE TEMP	-40° C - +80° C
CONTROL	DMX




ELECTRICAL DATA

POWER CONSUMPTION	60W, 72W
SUPPLY VOLTAGE	220 - 240V AC
COLORS	RGB, RGBW 3000°K, RGBW 4000°K, RGBW 6500°K
LUMENS (Delivered)	72W - 3888lm, RGBW 3000°K @ 8° Beam 72W - 3780lm, RGBW 3000°K @ 15° Beam



DRAWING

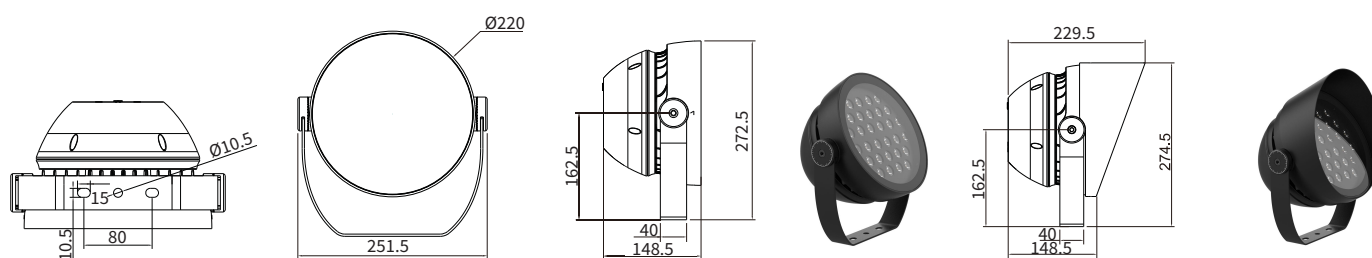

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	OPTIC	VOLTAGE	CONTROL	FINISH	ACCESSORIES
LFL-R-60	60 - 60W	1 RGB	8 - 8°	AC - 220V AC	DMX - DMX512	GB - Graphite Black (RAL 9011)	AGH - Anti Glare Hood
LFL-R-72	72 - 72W	2 RGBW3000°K	15 - 15°			IG - Iron Grey (RAL7011)	HCS - Honeycomb Screen
		3 RGBW4000°K	30 - 30°			SW - Signal White (RAL 9003)	NA - No Accessory
		4 RGBW6500°K	45 - 45°			SG - Signal Green (RAL6032)	
			60 - 60°			XX - Custom Color Finish	
			15x60 - 15°x60°				
			20x40 - 20°x40°				

Sample: LFL-R-60 - 60 - 1 - 8 - AC - DMX - WH - AGH