

# LINEAR FIXTURE DIFFUSED SLIM SPEC SHEET



LFD-S-15




**IP67**  
WATER  
PROOF



**15W**

The LFD series linear LED light fixtures are a simple, yet elegant solution for slick wall washing applications where a diffused single color light is desired along a floor, wall or ceiling. The LFD series in particular has the mounting option hidden behind the fixture to give it a clean, look unobtrusive.

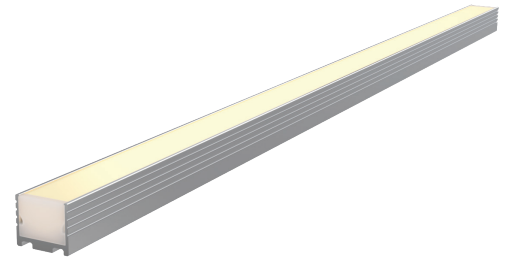

## FEATURES

<b>OPERATING VOLTAGE</b>	24 Volts DC
<b>OPERATING TEMPERATURE</b>	-20°C to 60°C
<b>LIGHT SOURCE</b>	COB strip
<b>LED QUANTITY</b>	400 LED/m
<b>FINISH</b>	White
<b>LAMP LIFE</b>	50,000 hrs
<b>IP RATING</b>	IP67
<b>MAXIMUM DISTANCE</b>	16.4 ft (5 m)
<b>COLORS</b>	2700K, 3000K, 4000K, 6500K, Blue, Green
<b>CONNECTION</b>	IP Rated Connector

**V 24 VDC**  
Operating Voltage


**W 15 W/m**  
Rated Power

## ELECTRICAL



<b>POWER</b>	15 W/m
<b>SUPPLY VOLTAGE</b>	24 VDC
<b>LUMEN (3000K)</b>	602 lm/m (183 lm/ft)
<b>RATED POWER</b>	15 W/m (4.56 W/ft)
<b>CRI</b>	90

## COLOR

Color	Lumens/m	Lumens/ft
2700K	650 lm	197 lm
3000K	752 lm	228 lm
4000K	830 lm	253 lm
6500K	827 lm	252 lm
Blue	187 lm	57 lm
Green	835 lm	253 lm

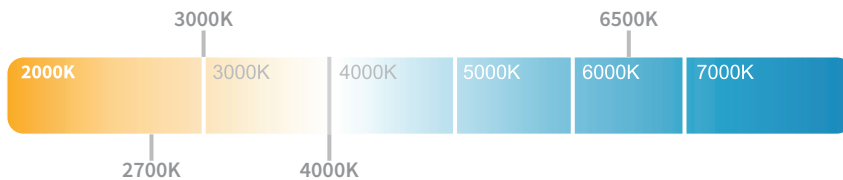

## DIMENSIONS

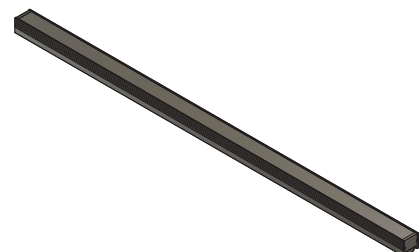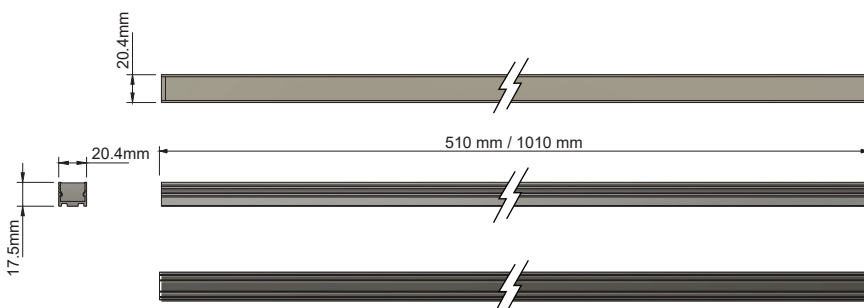

# LINEAR FIXTURE DIFFUSED SLIM SPEC SHEET

LFD-S-15


## ORDERING CODE

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE	LENGTH	MOUNTING	CONNECTOR
LFD-S	O - OUTDOOR	15W - 15 WATTS	CT27 - 2700K CT30 - 3000K CT40 - 4000K CT65 - 6500K BL - Blue GR - Green	500 - 510 mm / 20 in 1000 - 1010 mm / 40 in xxx - Custom	DM - DIRECT MOUNT MC - MOUNTING CLIP	IP - IP CONNECTOR

Sample: LFD-S-O-15W-CT30-500-MC-IP

## MOUNTING OPTIONS

### Direct Mount



### Mounting Clip

