

DOT SERIES

DT1

Mono IP66 WATER PROOF **CE** IK08

DOT Series is a family of miniature LED Garden Spike Lights, available in various sizes, wattages, and feature options to cater to your specific installation requirements. These machined aluminum housing with a selection of stylish color finishes, provide robust performance. The Garden Spike Lights offer a simple yet effective solution for adding accent lighting to your garden, illuminating shrubs and trees effortlessly, thanks to their sturdy spikes for easy ground placement. Precision-crafted with machining excellence, these LED Spike Lights feature a sleek and durable design, crafted from high-quality aluminum that can withstand the harshest outdoor conditions. Its adjustable head ensures precise light direction, allowing you to accentuate key landscape elements or create beautiful lighting effects. Elevate your outdoor ambiance with our DOT Series Spike Lights, combining precision engineering with aesthetic appeal.



FEATURES

MATERIAL	Aluminum
FINISH	Black, Dark Grey, Light Grey
RATED POWER	1W, 2.7W
WORKING VOLTAGE	12V DC, 24V DC
BEAM ANGLE	10°, 15°, 26°, 33°, 60°
MOUNTING	Ground / Spike
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø35 x 59 mm
OPERATION TEMP	-30° C - +50° C
CONTROL	On/Off, Dali

CREE LED Quality

12V DC / 24V DC Working Voltage



1W/2.7W Rated power




ELECTRICAL DATA

POWER CONSUMPTION	1W, 2.7W
SUPPLY VOLTAGE	12V DC, 24V DC
COLORS	2700K, 3000K, 4000K
CRI	90
LUMEN	120lm (1W), 189lm (2.7W)

DRAWING

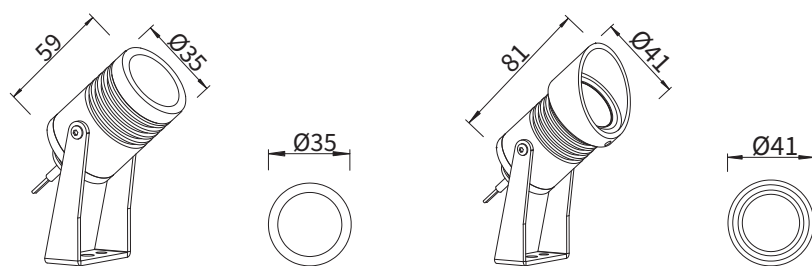

Accessories

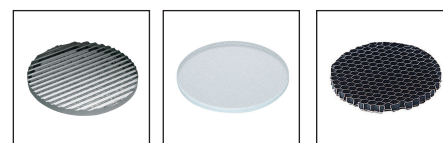

Linear Spreader Lens Beam Softening Lens Honeycomb Louver

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	OPTIC	VOLTAGE	CONTROL	FINISH	MOUNTING	ACCESSORIES
DT1	1 - 1W 2.7 - 2.7W	(CT30)	3000K	10 - 10°	12 - 12V DC	SW - On/Off	BK - Black	SP - Spike LSL - Linear Spreader Lens BSL - Beam Softening Lens HCL - Honeycomb Louver JBS - IP68 Junction Box (Single fixture) JBM - IP68 Junction Box (Multy fixture) AH - Angled Hood NA - No Accessory
		(CT40)	4000K	15 - 15°	24 - 24V DC	DA - Dali	DG - Dark Grey	
		(CT50)	5000K	26 - 26°			LG - Light Grey	
					33 - 33° 60 - 60°			

Sample: DT1 - 2.7 - CT30 - 10 - 12 - SW - BK - SP - LSL