

# DOT SERIES

## DT2

**Mono** IP66 WATER PROOF **CE** IK08

DOT Series is a family of miniature LED Garden Spike Lights, available in various sizes, wattages, and feature options to cater to your specific installation requirements. These machined aluminum housing with a selection of stylish color finishes, provide robust performance. The Garden Spike Lights offer a simple yet effective solution for adding accent lighting to your garden, illuminating shrubs and trees effortlessly, thanks to their sturdy spikes for easy ground placement. Precision-crafted with machining excellence, these LED Spike Lights feature a sleek and durable design, crafted from high-quality aluminum that can withstand the harshest outdoor conditions. Its adjustable head ensures precise light direction, allowing you to accentuate key landscape elements or create beautiful lighting effects. Elevate your outdoor ambiance with our DOT Series Spike Lights, combining precision engineering with aesthetic appeal.



### FEATURES

MATERIAL	Aluminum
FINISH	Black, Dark Grey, Light Grey
RATED POWER	3W, 5W
WORKING VOLTAGE	12V DC, 24V DC
BEAM ANGLE	5W (24° / 40° / 60°); 3W (20° / 40° / 60°) 24 Deg only available for 5W
MOUNTING	Ground / Spike
CONNECTION	Outdoor rated connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Ø47 x 95 mm
OPERATION TEMP	-30° C - +50° C
CONTROL	On/Off, Dali

CREE LED Quality

12V DC / 24V DC Working Voltage



3W/5W Rated power

### ELECTRICAL DATA


POWER CONSUMPTION	3W, 5W
SUPPLY VOLTAGE	12V DC, 24V DC
COLORS	2700K, 3000K, 4000K
CRI	90
LUMEN	250lm (3W), 550lm (5W)



### DRAWING

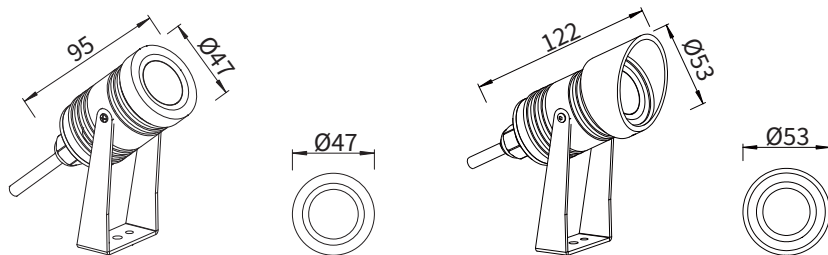

#### Accessories

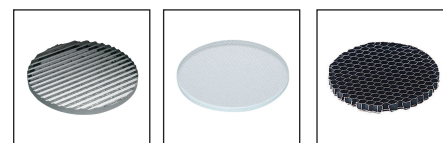

Linear Spreader Lens Beam Softening Lens Honeycomb Louver

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	OPTIC	VOLTAGE	CONTROL	FINISH	MOUNTING	ACCESSORIES
DT2	3 - 3W	(CT30)	3000K	20 - 20° (3W)	12 - 12V DC	SW - On/Off	BK - Black	FGL - Frosted Glass Lens SGL - Silk-screen Glass Lens HCL - Honeycomb Louver JBS - IP68 Junction Box (Single fixture) JBM - IP68 Junction Box (Multy fixture) AH - Angled Hood NA - No Accessory
		(CT40)	4000K	40 - 40° (3W)	24 - 24V DC	DA - Dali	DG - Dark Grey	
	5 - 5W	(CT50)	5000K	60 - 60° (3W)			BK - Black	
		24 - 24° (5W)	24 - 24V DC	DA - Dali	DG - Dark Grey			
		40 - 40° (5W)			LG - Light Grey			
		60 - 60° (5W)						

Sample: DT2 - 3 - CT30 - 20 - 12 - SW - BK - SP - FGL