

DOT SERIES

DT3

Mono IP66 WATER PROOF **CE** IK08

DOT Series is a family of miniature LED Garden Spike Lights, available in various sizes, wattages, and feature options to cater to your specific installation requirements. These machined aluminum housing with a selection of stylish color finishes, provide robust performance. The Garden Spike Lights offer a simple yet effective solution for adding accent lighting to your garden, illuminating shrubs and trees effortlessly, thanks to their sturdy spikes for easy ground placement. Precision-crafted with machining excellence, these LED Spike Lights feature a sleek and durable design, crafted from high-quality aluminum that can withstand the harshest outdoor conditions. Its adjustable head ensures precise light direction, allowing you to accentuate key landscape elements or create beautiful lighting effects. Elevate your outdoor ambiance with our DOT Series Spike Lights, combining precision engineering with aesthetic appeal.



FEATURES

| | |
|-----------------|------------------------------|
| MATERIAL | Aluminum |
| FINISH | Black, Dark Grey, Light Grey |
| RATED POWER | 9W |
| WORKING VOLTAGE | 12V DC, 24V DC |
| BEAM ANGLE | 20°, 30°, 38° |
| MOUNTING | Ground / Spike |
| CONNECTION | Outdoor rated connections |
| LAMP LIFE | 50,000 hrs |
| DIMENSIONS | Ø61 x 110 mm |
| OPERATION TEMP | -30° C - +50° C |
| CONTROL | On/Off, Dali |

CREE LED Quality

12V DC / 24V DC Working Voltage



9W Rated power

ELECTRICAL DATA


| | |
|-------------------|---------------------|
| POWER CONSUMPTION | 9W |
| SUPPLY VOLTAGE | 12V DC, 24V DC |
| COLORS | 2700K, 3000K, 4000K |
| CRI | 90 |
| LUMEN | 1050lm (9W) |



DRAWING

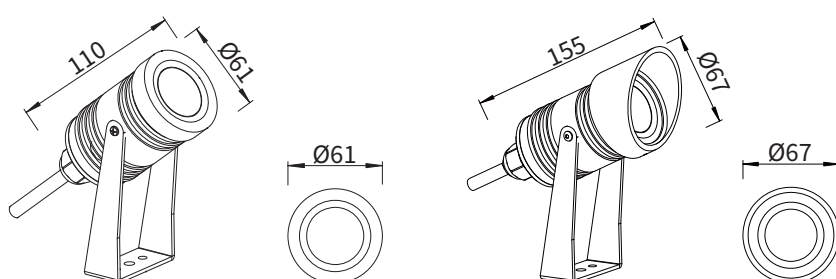

Accessories

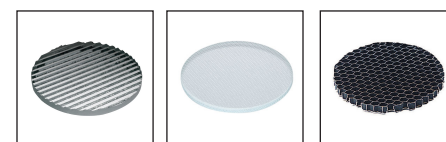

Linear Spreader Lens Beam Softening Lens Honeycomb Louver

ORDERING LOGIC

| PRODUCT | WATTAGE | COLOR TEMPERATURE | OPTIC | VOLTAGE | CONTROL | FINISH | MOUNTING | ACCESSORIES | |
|---------|---------|-------------------|-------|----------|-------------|-------------|-----------------|-------------|---|
| DT3 | 9 - 9W | (CT30) | 3000K | 20 - 20° | 12 - 12V DC | SW - On/Off | BK - Black | SP - Spike | LSL - Linear Spreader Lens BSL - Beam Softening Lens HCL - Honeycomb Louver JBS - IP68 Junction Box (Single fixture) JBM - IP68 Junction Box (Multy fixture) AH - Angled Hood NA - No Accessory |
| | | (CT40) | 4000K | 30 - 30° | 24 - 24V DC | DA - Dali | DG - Dark Grey | | |
| | | (CT50) | 5000K | 38 - 38° | | | LG - Light Grey | | |

Sample: DT3 - 9 - CT30 - 20 - 12 - SW - BK - SP - LSL