

OXALIS RECTANGLE OLS R

Mono IP65 IK08 CE

The Oxalis Rectangle is a wall luminaire designed to provide directed light for various outdoor applications. This compact and robust LED luminaire is available in multiple sizes and offers different light outputs to suit specific lighting needs. It can be mounted at lower heights to illuminate pathways, enhancing safety and egress in outdoor spaces. With a robust build of cast aluminum, frosted safety glass, and an anodized aluminum reflector, it ensures longevity and efficient illumination.



FEATURES


HOUSING	Heavy duty die-cast aluminum
WORKING VOLTAGE	100-277V AC
MOUNTING	Wall mounted
DIFFUSER	White crystal glass
BEAM ANGLE	Asymmetrical
DIMENSIONS	200, 300, 400 x 120 x 75mm
OPERATION TEMP	-20° C - +50° C
BODY COLOR	White, Black, Silver Grey, Graphite
LAMP LIFE	50,000 hrs
CONTROL	On/Off

- CREE / LUMILEDS / CITIZEN
LED Quality
- 100~277V AC
Working Voltage
- 6W/12W/16W
Rated power

ELECTRICAL DATA

RATED POWER	6W, 12W, 16W
COLORS	2700K, 3000K, 4000K, 5000K,
CRI	80+
LUMEN OUTPUT	480lm (6W), 960lm (12W), 1280lm (16W)

DIMENSION

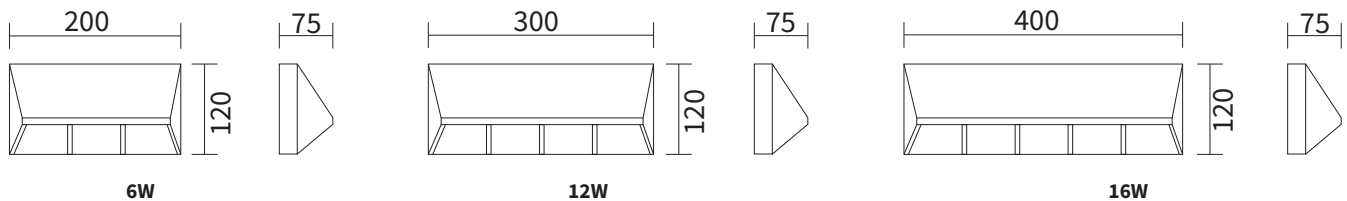

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	CONTROL	FINISH
OLS R	6 - 6W	(CT27) 2700K	SW - On/Off	WH - White
	12 - 12W	(CT30) 3000K		BK - Black
	16 - 16W	(CT40) 4000K		SG - Silver Grey
		(CT50) 5000K		GR - Graphite

Sample: OLS R - 6 - CT27 - SW - WH