

# FRAME POLE LIGHT

## FAE-PL

**Mono** IP65 CE

Frame pole light is suitable for exterior and pathway lighting in public spaces. The efficient technology ensures a glare free orientation and guidance for passers-by and vehicles drivers with maximum visual comfort. The slim and sleek design makes an architectural element in itself.



### FEATURES

HOUSING	Heavy duty die-cast aluminium
WORKING VOLTAGE	100-240V ac
MOUNTING	Ground mounted
DIMENSIONS	Ø180x1000, 1200, 4000(H)mm
OPTIC	Type 2, Type 3, Type 4 light distribution available
OPERATION TEMP	-20° C - +50° C
BODY COLOR	Black, Grey
LAMP LIFE	50,000 hrs
CONTROL	On/Off
IP RATING	IP 65

CREE/LUMILEDS/BRIDGELUX  
LED Quality


100-240V AC  
Working Voltage

20W /30W/38W/48W  
Rated power

### ELECTRICAL DATA

RATED POWER	20W, 30W, 38W, 48W
COLORS	3000K, 4000K, 6000K
CRI	80
LUMEN	90-95lm/W

### DIMENSION

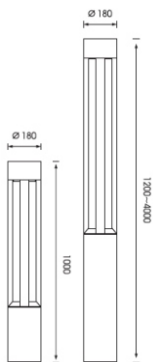

### ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	OPTIC	CONTROL	FINISH
FAE-PL	20 - 20W	(CT30) 3000K	T2 - Type 2 Distribution	ND - Non Dimmable	BK - Black
	30 - 30W	(CT40) 4000K	T3 - Type 3 Distribution		GR - Grey
	38 - 38W	(CT60) 6000K	T4 - Type 4 Distribution		
	48 - 48W				

Sample: FAE-PL - 20 - CT30 - T2 - ND - BK