

FRAME POLE LIGHT

FAE-PL-SQ

Mono IP65 CE

Frame pole light is suitable for exterior and pathway lighting in public spaces. The efficient technology ensures a glare free orientation and guidance for passers-by and vehicles drivers with maximum visual comfort. The slim and sleek design makes an architectural element in itself.

FEATURES

HOUSING	Die-cast aluminum
WORKING VOLTAGE	100-240V AC 50-60Hz, 24V DC
MOUNTING	Ground mounted
DIMENSIONS	150, 220 x 150, 220 x 1000, 4500mm
OPTIC	Type 2, Type 3, Type 4 light distribution available
OPERATION TEMP	-30° C - +50° C
BODY COLOR	White, Black, Silver Grey, Graphite
LAMP LIFE	50,000 Hrs
CONTROL	On/Off, Dali




- CREE/LUMILEDS/BRIDGELUX
LED Quality
- 240V AC, 24V DC
Working Voltage
- 18W/26W/39W
Rated power

ELECTRICAL DATA

RATED POWER	18W, 26W, 39W
COLORS	3000K, 4000K, 5000K
CRI	80
DELIVERED LUMEN	95-120lm/W

DIMENSION

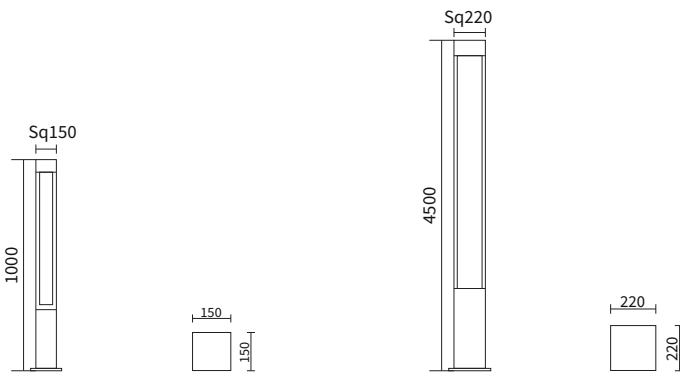

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	OPTIC	CONTROL	FINISH
FAE-PL-SQ	18 - 18W	(CT30) 3000K	T2 - Type 2 Distribution	ND - Non Dimmable	WH - White
	26 - 26W	(CT40) 4000K	T3 - Type 3 Distribution	DA - Dali	BK - Black
	39 - 39W	(CT50) 5000K	T4 - Type 4 Distribution		SG - Silver Grey GR - Graphite

Sample: FAE-PL-SQ - 18 - CT30 - T2 - ND - WH