

MINI FRAME BOLLARD

MI-FAE-BO107

Mono IP67 CE

Mini Frame bollard is suitable for exterior and pathway lighting in public spaces. The efficient technology ensures a glare free orientation and guidance for passers-by and vehicles drivers with maximum visual comfort. The slim and sleek design makes an architectural element in itself.

FEATURES

HOUSING	Anodized Aluminium
WORKING VOLTAGE	100-240V AC
MOUNTING	Ground mounted
DIMENSIONS	Ø107 x (H)256mm
BEAM ANGLE	120°
OPERATION TEMP	-20° C - +50° C
BODY COLOR	Black, Grey
LAMP LIFE	50,000 hrs
CONTROL	On/Off
IP RATING	IP 67



OSRAM
LED Quality


100-240V AC
Working Voltage

7W
Rated power

ELECTRICAL DATA

RATED POWER	7W
COLORS	3000K, 4000K, 6000K
CRI	80
LUMEN	560lm

DIMENSION

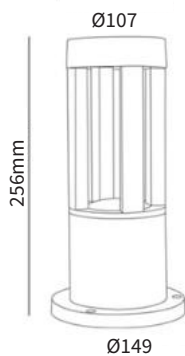

ORDERING LOGIC

PRODUCT	WATTAGE	OPTIC	COLOR TEMPERATURE	CONTROL	FINISH
MI-FAE-BO107	7 - 7W	120 - 120°	(CT30) 3000K (CT40) 4000K (CT60) 6000K	ND - Non Dimmable	BK - Black GR - Grey

Sample: MI-FAE-BO107 - 7 - 120 - CT30 - ND - BK