

CLASSY SERIES

CLASSY RECESSED WALL WASHER FIXED TRIM

Mono IP44/IP65 **CE**

The Classy Series is a multi-head modular downlight series available in Trimless, Trim, and Surface-mounted versions. It comes with fixed, adjustable long and short snoots, wall wash, and spotlight optics, making it suitable for use in a wide range of applications, including residential areas, shopping malls, high-end stores, offices, restaurants, bars, museums, art galleries, showrooms, and exhibition centers. The luminaire features an aluminum forged heatsink, powder-coated steel trims, a die-cast plastic snoot baffle, and interchangeable LED light engines based on wattage requirements.



FEATURES

| | |
|-----------------|--|
| FINISH | White, Black |
| RATED POWER | 9W, 12W, 14W, 18W |
| WORKING CURRENT | 250mA (9W), 350mA (12W), 350mA (14W), 500mA (18W) |
| RADIANCE ANGLE | 13°, 15°, 24°, 31°, 36°, 50° |
| MOUNTING | Ceiling recessed |
| CONNECTION | Indoor rated connections |
| LAMP LIFE | 50,000 Hrs |
| DIMENSION | 115 x 115mm(ST1), 206 x 115mm(ST2), 297 x 115mm(ST3) |
| OPERATING TEMP | -20° C - +50° C |
| CONTROL | On/Off, Dali |

BRIDGELUX/CREE
LED Quality

250mA/350mA/500mA
Working Current

9W/12W/14W/18W
Rated power


ELECTRICAL DATA

| | |
|----------------|--|
| SUPPLY VOLTAGE | 220-240VAC |
| COLORS | 2700K, 3000K, 4000K, Tunable white (2700-6500K), Dim to warm (1800-3000K) |
| CRI | 90+ |
| LUMEN | 9W - 866-1047lm (Tunable White), 12W - 36-1265lm (Dim to Warm), 14W - 1193lm, 18W - 2140lm |

LIGHT ENGINE



DIMENSIONS

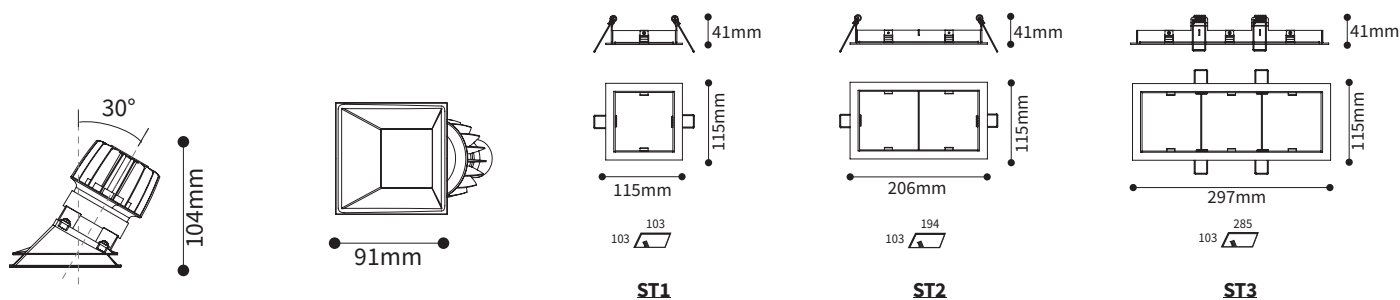

ORDERING LOGIC

| PRODUCT | SNOOT | WATTAGE | COLOR TEMPERATURE | CONTROL | BEAM ANGLE | FINISH | IP RATING |
|---|----------------|---------------|---------------------------------|-------------------------|-------------------------------|------------|-----------|
| CSY-R-WWF-TM | ST1 - Snoot-T1 | 9 - 9W (TW) | (CT27) 2700K | ND - ON/OFF | 13 - 13° (LE-35-DW, LE-35-TW) | BK - Black | 44 - IP44 |
| | ST2 - Snoot-T2 | 12 - 12W (DW) | (CT30) 3000K | DA - Dali | 15 - 15° (LE-36, LE-37) | WH - White | 65 - IP65 |
| | ST3 - Snoot-T3 | 14 - 14W | (CT40) 4000K | 24 - 24° (LE-36, LE-37) | | | |
| | | 18 - 18W | (TW) Tunable White (2700-6500K) | | 31 - 31° (LE-35-DW, LE-35-TW) | | |
| | | | (DW) Dim to Warm (1800-3000K) | | | | |
| | | | 50 - 50° (LE-36, LE-37) | | | | |
| Sample: CSY-R-WWF-TM - ST1 - 9 - CT27 - ND - 13 - BK - 44 | | | | | | | |