

# CLASSY SERIES

## CLASSY RECESSED LONG SNOOT ADJUSTABLE TRIMLESS

**Mono IP44/IP65 C E**

The Classy Series is a multi-head modular downlight series available in Trimless, Trim, and Surface-mounted versions. It comes with fixed, adjustable long and short snoots, wall wash, and spotlight optics, making it suitable for use in a wide range of applications, including residential areas, shopping malls, high-end stores, offices, restaurants, bars, museums, art galleries, showrooms, and exhibition centers. The luminaire features an aluminum forged heatsink, powder-coated steel trims, a die-cast plastic snoot baffle, and interchangeable LED light engines based on wattage requirements.



### FEATURES

FINISH	White, Black
RATED POWER	9W, 10W, 12W, 14W, 18W
WORKING CURRENT	250mA (9W), 800mA (10W), 350mA (12W), 350mA (14W), 500mA (18W)
RADIANCE ANGLE	6°, 13°, 15°, 24°, 31°, 36°, 50°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	134 x 134mm(ST1), 225 x 134mm(ST2), 315 x 134mm(ST3)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Dali

BRIDGELUX/CREE  
LED Quality

250mA/350mA/500mA/800mA  
Working Current

9W/10W/12W/14W/18W  
Rated power


### ELECTRICAL DATA

SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 4000K, Tunable white (2700-6500K), Dim to warm (1800-3000K)
CRI	90+
LUMEN	9W - 866-1047lm (Tunable White), 10W - 774lm, 12W - 36-1265lm (Dim to Warm), 14W - 1193lm, 18W - 2140lm


### LIGHT ENGINE



### DIMENSIONS

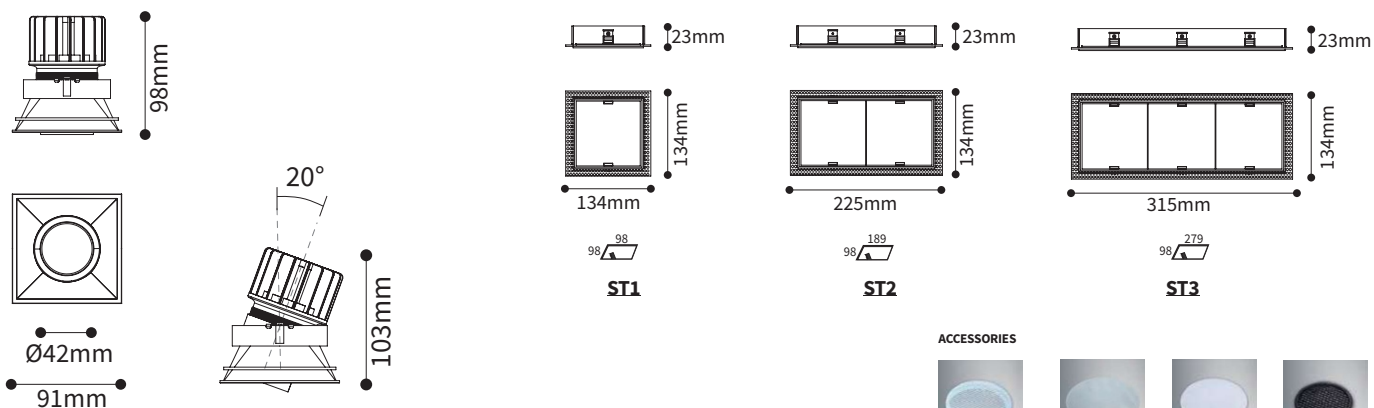

#### ACCESSORIES

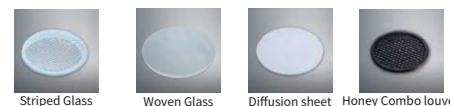

### ORDERING LOGIC

PRODUCT	SNOOT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAM ANGLE	FINISH	ACCESSORIES	IP RATING
CSY-R-LSA-TLS	ST1 - Snoot-T1	9- 9W (TW)	(CT27) 2700K	ND - ON/OFF	6 - 6° (10W only) LE-35	BK - Black	SG - Striped Glass	44 - IP44
	ST2 - Snoot-T2	10 - 10W	(CT30) 3000K	DA - Dali	13 - 13° (LE-35-DW, LE-35-TW)	WH - White	HC - Honey Combo louver	65 - IP65
	ST3 - Snoot-T3	12 - 12W (DW)	(CT40) 4000K	Tunable White (2700-6500K) Dim to Warm (1800-3000K)	15 - 15° (LE-36, LE-37)	DS - Diffusion sheet	WG - Woven Glass	NO - No Accessory
		14 - 14W (TW)	24 - 24° (LE-36, LE-37)					
		18 - 18W (DW)	31 - 31° (LE-35-DW, LE-35-TW)					
					36 - 36° (LE-36, LE-37)			
					50 - 50° (LE-36, LE-37)			

Sample: CSY-R-LSA-TLS - ST1 - 10 - CT27 - ND - 6 - BK - SG - 44