

CLASSY SERIES

CLASSY RECESSED WALL WASHER FIXED TRIMLESS

Mono IP44/IP65 **CE**

The Classy Series is a multi-head modular downlight series available in Trimless, Trim, and Surface-mounted versions. It comes with fixed, adjustable long and short snoots, wall wash, and spotlight optics, making it suitable for use in a wide range of applications, including residential areas, shopping malls, high-end stores, offices, restaurants, bars, museums, art galleries, showrooms, and exhibition centers. The luminaire features an aluminum forged heatsink, powder-coated steel trims, a die-cast plastic snoot baffle, and interchangeable LED light engines based on wattage requirements.



FEATURES

FINISH	White, Black
RATED POWER	9W, 12W, 14W, 18W
WORKING CURRENT	250mA (9W), 350mA (12W), 350mA (14W), 500mA (18W)
RADIANCE ANGLE	6°, 13°, 15°, 24°, 31°, 36°, 50°
MOUNTING	Ceiling recessed
CONNECTION	Indoor rated connections
LAMP LIFE	50,000 Hrs
DIMENSION	134 x 134mm(ST1), 225 x 134mm(ST2), 315 x 134mm(ST3)
OPERATING TEMP	-20° C - +50° C
CONTROL	On/Off, Dali

BRIDGELUX/CREE
LED Quality

250mA/350mA/500mA
Working Current

9W/12W/14W/18W
Rated power


ELECTRICAL DATA

SUPPLY VOLTAGE	220-240VAC
COLORS	2700K, 3000K, 4000K, Tunable white (2700-6500K), Dim to warm (1800-3000K)
CRI	90+
LUMEN	9W - 866-1047lm (Tunable White), 12W - 36-1265lm (Dim to Warm), 14W - 1193lm, 18W - 2140lm

LIGHT ENGINE



DIMENSIONS

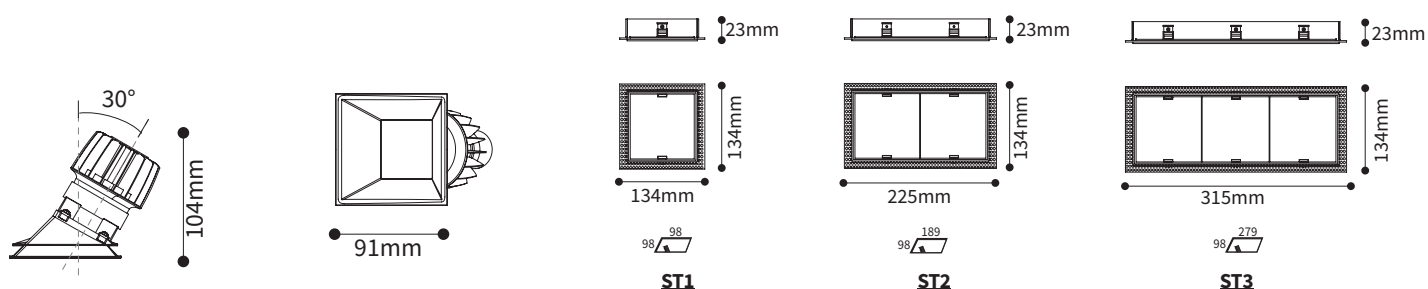

ORDERING LOGIC

PRODUCT	SNOOT	WATTAGE	COLOR TEMPERATURE	CONTROL	BEAM ANGLE	FINISH	IP RATING
CSY-R-WWF-TLS	ST1 - Snoot-T1	9 - 9W (TW)	(CT27) 2700K	ND - ON/OFF	13 - 13° (LE-35-DW, LE-35-TW)	BK - Black	44 - IP44
	ST2 - Snoot-T2	12 - 12W (DW)	(CT30) 3000K	DA - Dali	15 - 15° (LE-36, LE-37)	WH - White	65 - IP65
	ST3 - Snoot-T3	14 - 14W	(CT40) 4000K	24 - 24° (LE-36, LE-37)			
		18 - 18W	(TW) Tunable White (2700-6500K)	31 - 31° (LE-35-DW, LE-35-TW)			
			(DW) Dim to Warm (1800-3000K)	36 - 36° (LE-36, LE-37)			
			50 - 50° (LE-36, LE-37)				
Sample: CSY-R-WWF-TLS - ST1 - 9 - CT27 - ND - 13 - BK - 44							