

LINEAR FIXTURE TRACK - PENDANT SPEC SHEET



LFT40-C



The LFT40-C Series is a collection of pendant lighting fixtures designed to enhance the ambiance of any space. With its wide range of track mounting options, the LFT40-C is compatible with recessed, surface and suspended pendant mounting. The series is equipped with dimming and standard color temperature of 3000K. The LFT40-C5 has a rated power of 23 Watts with three beam angles options, suitable for a different environment.




LFT40-C6

SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	23W
CONTROL	0/1-10 V Dimmable
FLUX	1666 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Copper
MOUNTING	Track mounted
PROJECTION	20°, 30°, 40°

- V** 120 VAC
Operating Voltage
- W** 23W
Rated Power

DIMENSIONS




ORDERING CODE


SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT40	C6-Pendant 6	23W - 23 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K	20D - 20 Degrees	RM - Recessed Mount	BK - Black	BK - Black
					CTXX - CUSTOM	30D - 30 Degrees	SM - Surface Mount	WH - White	WH - White
						40D - 40 Degrees	PM - Pendant Mount	CO - Copper	CO - Copper

Sample: LFT40-C6 - 23W- AC - 90 - CT30 - 30D - SM - BK - CO


PHOTOMETRIC DATA



BEAM ANGLE: 20°
MAX. I: 8337 cd.
FLUX: 1666 lm



BEAM ANGLE: 30°
MAX. I: 5746 cd.
FLUX: 1666 lm






BEAM ANGLE: 40°
MAX. I: 3537 cd.
FLUX: 1666 lm

LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES


LFT40-C

MOUNTING SPECIFICATIONS




TRIMLESS: LFT-T-01

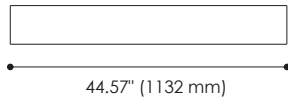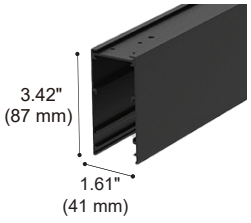


TRIMLESS TRACK SECTION	
Article number	TYPE
LFT-T-01-44	Channel
LFT-T-01-89	Channel

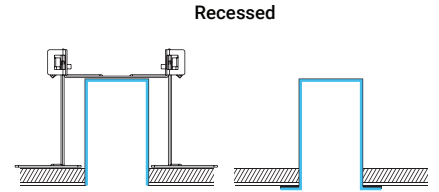

TRIM: LFT-F-01

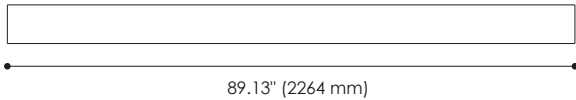
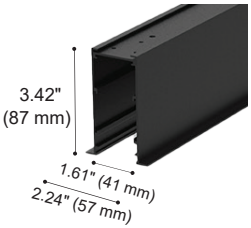


TRIMMED TRACK SECTION	
Article number	TYPE
LFT-F-01-44	Channel
LFT-F-01-89	Channel

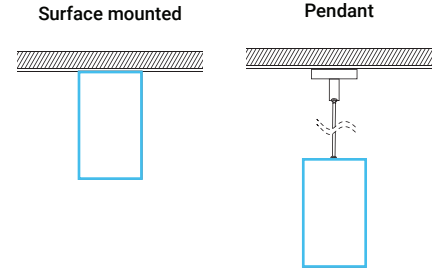


ACCESSORIES

ALL MODELS

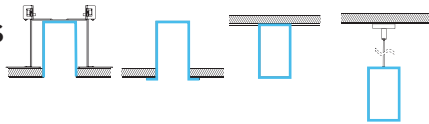

3PCS

SKU: LFT-NC-02
Type: Surface mounted & Pendant reinforced plate



SKU: LFT-NC-06
Type: Light Leak-proof aluminium extrusion reinforce plate




Colours
● Black ○ White

SKU:
LFT-NE-01-11 11.14"(283 mm)
LFT-NE-01-22 22.28"(566 mm)
Type: Blank cover




SKU: LFT-SA-41
Type: Power cord connector



SKU: LFT-PA-41-180
71" (1800 mm)
Type: Power cord connect to AC



SKU: LFT-SA-41-30 12" (300 mm)
LFT-SA-41-60 24" (600 mm)
Type: Power cord connect between modules





SKU: LFT-PSA-31-180 71" (1800 mm)
Type: Signal wire connect to system / dimmer




SKU: LFT-SSA-31-30 12" (300 mm)
LFT-SSA-31-60 24" (600 mm)
Type: Signal wire connect between modules

PENDANT



SKU: LFT-DI-15
Type: Pendant Kit for power connection (without power cord)





SKU: LFT-DI-15-V
Type: Pendant Kit for power connection (without power cord and single wire)



SKU: LFT-DI-16
Type: Pendant kit


TRIM



2PCS


SKU: LFT-NC-04
Type: Trim end cap

TRIMLESS



2PCS

SKU: LFT-NC-01
Type: End cap



2PCS

SKU: LFT-NR-02
Type: Trimless bracket