

MARKER MINI 64 SPEC SHEET

MM-64




CE 5 W (CV)
4 W (CC)

Mini Marker lights the way with high CRI, even in the most harsh conditions. Manufactured with 316L stainless steel and a borosilicate glass lens, this in-ground/in-wall luminaire is immune to corrosion caused by salt, oxidization, and traffic. With several beam options and CCT's to choose from, it is easy to find the right coverage for ambiance and safety.

FEATURES

OPERATING VOLTAGE	24 VDC CV / 1200 mA CC
OPERATING TEMPERATURE	-20°C to +50°C
RATED POWER	5W (CV) / 4W (CC)
CRI	>90
NO OF LEDS	1
LIGHT SOURCE	Samsung
CONTROL	Switched, 1-10V, DALI
OPTICS	Lens
BINNING	3-step
COLOR RANGE	2200K, 2700K, 3000K, 3500K, 4000K, 5000K
MATERIAL	316L Stainless Steel (top cover) / Aluminum (main body)
FINISH	Silver (top) and black (body) (Std.)
PROJECTION	15°, 25°, 32°
MOUNTING	In-floor, In-ground
CONNECTION	Outdoor Rated Connections
LAMP LIFE	50,000 hrs
DIMENSIONS	Dia. 64 x 90.5 mm

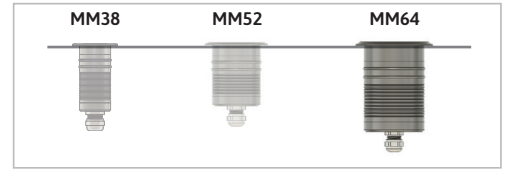

1 LED
LED Quantity

E 24 VDC (CV) / 1200 mA (CC)
Electrical Operation

W 5W (CV) / 4W (CC)
Rated power

LUMEN DATA AT 2700K

Data	Narrow	Medium	Wide
Beam Angle	15 Degree	25 Degree	32 Degree
Lumens	254 lm	205 lm	181 lm


Application




Narrow

Medium


Wide

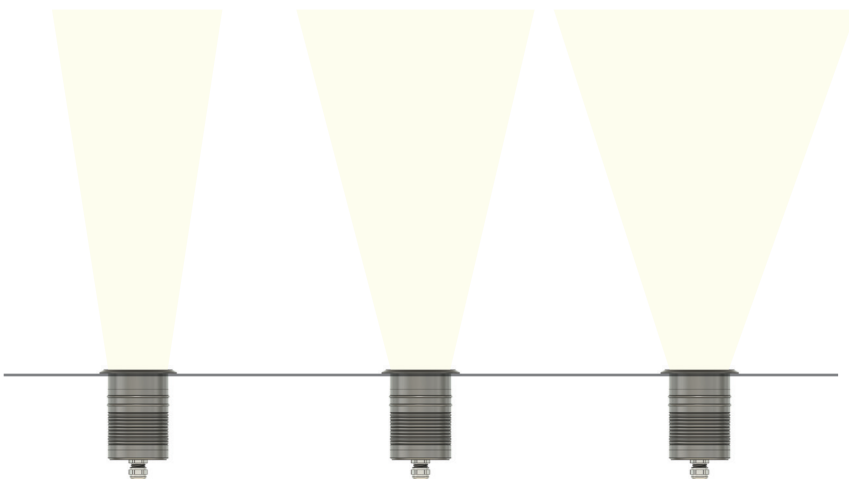

Eye Lid (Optional)



Honeycomb Louver (Optional)



MARKER MINI 64 SPEC SHEET

MM-64




ORDERING CODE

SERIES	TYPE	POWER	DRIVER	CRI	COLOR TEMPERATURE	PROJECTION	CONTROL	FINISH		ACCESSORIES
MKR-MI	64	5W - 5 WATTS (CV) 4W - 4 WATTS (CC)	CV - Constant Voltage (5W) CC - Constant Current (4W)	90 - CRI90	CT22 - 2200K CT27 - 2700K CT30 - 3000K CT35 - 3500K CT40 - 4000K CT50 - 5000K	15D - 15 Degrees 25D - 25 Degrees 32D - 32 Degrees	SW - Switched AN - 1-10V DA - DALI	BODY FINISH BL - Black	TOP FINISH SS - Stainless Steel XX - Custom	EL - Eye Lid HL - Honeycomb Louver


Sample: MKR-MI- 64 - 5W- CV - 90 - CT30 - 32D - SW - BL - XX - EL

DIMENSIONS

With Tube

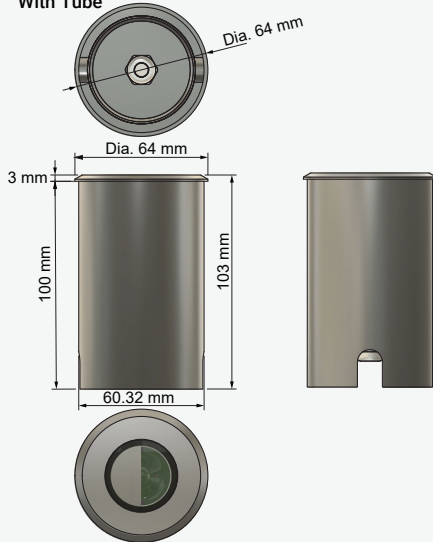


Without Tube

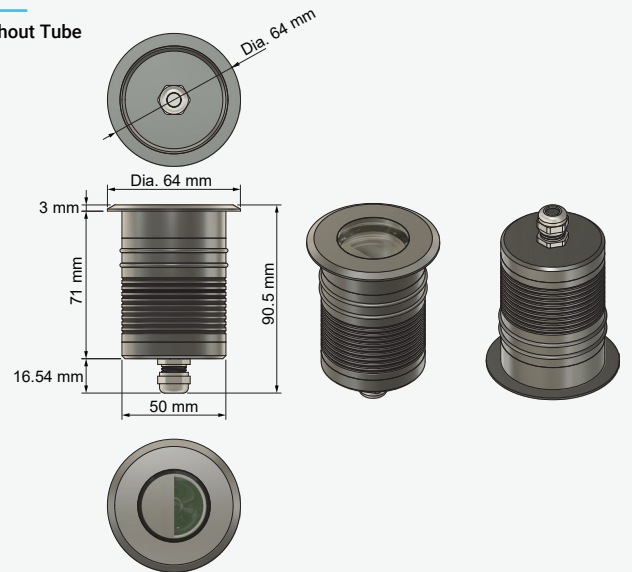


PHOTOMETRIC DATA

Spectral Distribution

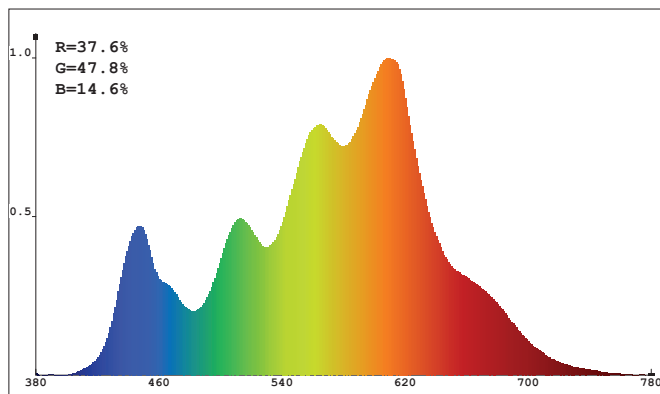

CIE 1931 Color Space

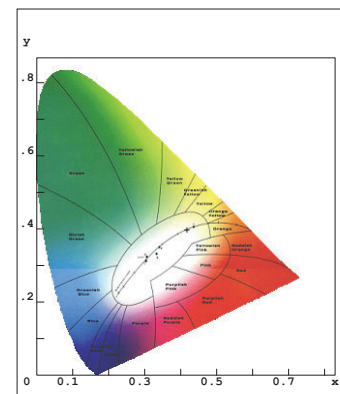

RELATED PRODUCTS

Marker Mini 52



Marker Mini 38

