

LINEAR FIXTURE TRACK - RECESSED DOWN LIGHT SPEC SHEET



LFT60-K



The LFT60-K Series is a recessed downlight fixture with a minimalistic and modern design. With its wide range of track mounting options, the LFT60-K is compatible with recessed, surface and suspended pendant mounting. This series is equipped with dimming and a standard color temperature of 3000K. The LFT60-K10 in particular has a length of 566 mm and a rated power of 23 Watts with three beam angle options, suitable for different environments.



LFT60-K10


V 120 VAC
Operating Voltage

W 23W
Rated Power

SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	23W
CONTROL	0/1-10 V Dimmable
FLUX	1518 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Piano Black
MOUNTING	Track mounted
PROJECTION	20°, 30°, 40°

DIMENSIONS

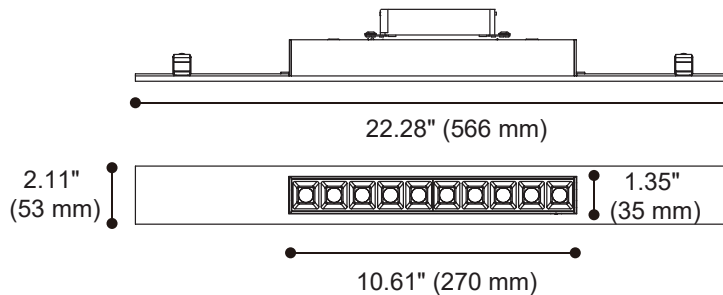


ORDERING CODE


SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT60	K10 - Recessed Downlight 10	23W - 23 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K CTXX - CUSTOM	20D - 20 Degrees 30D - 30 Degrees 40D - 40 Degrees	RM - Recessed Mount SM - Surface Mount PM - Pendant Mount	BK - BLACK WH - WHITE	BK - BLACK WH - WHITE PBK - PIANO BLACK

Sample: LFT 60-K20 - 23W - AC - 90 - CT30 - 40D - SM - BK - WH


PHOTOMETRIC DATA



BEAM ANGLE: 20°
MAX. I: 8473 cd.
FLUX: 1518 lm
SC (0-180): .34
SC (90-290): .38



BEAM ANGLE: 30°
MAX. I: 6291 cd.
FLUX: 1599 lm
SC (0-180): .42
SC (90-290): .48



BEAM ANGLE: 40°
MAX. I: 3368 cd.
FLUX: 1557 lm
SC (0-180): .68
SC (90-290): .66




LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES




LFT60-K

MOUNTING OPTIONS




TRIMLESS: LFT-T-11




TRIMLESS TRACK SECTION	
Article number	TYPE
LFT-T-11-44	Channel
LFT-T-11-89	Channel

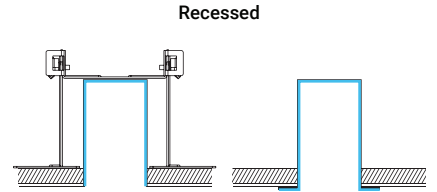

TRIM: LFT-F-11

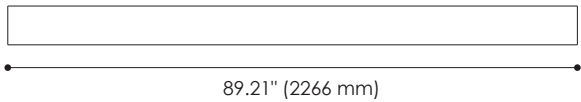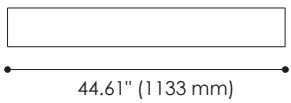



TRIMMED TRACK SECTION	
Article number	TYPE
LFT-F-11-44	Channel
LFT-F-11-89	Channel

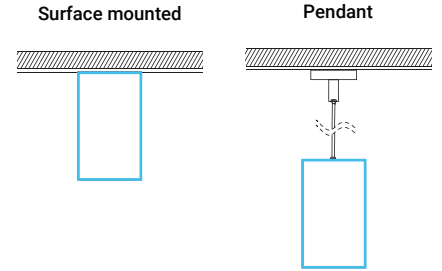


ACCESSORIES

ALL MODELS



3PCS

SKU : LFT-NC-02
Type : Surface mounted & Pendant reinforced plate



SKU : LFT-NC-07
Type : Light Leak-proof aluminium extrusion reinforce plate



Colours
Black White

SKU :
LFT-NE-02-11 11.14" (283 mm)
LFT-NE-02-22 22.28" (566 mm)
Type : Blank cover




SKU : LFT-SA-41
Type : Power cord connector




SKU : LFT-PA-41-180
71" (1800 mm)
Type : Power cord connect to AC



SKU : LFT-SA-41-30 12" (300 mm)
LFT-SA-41-60 24" (600 mm)
Type : Power cord connect between modules





SKU : LFT-PSA-31-180 71" (1800 mm)
Type : Signal wire connect to system / dimmer




SKU : LFT-SSA-31-30 12" (300 mm)
LFT-SSA-31-60 24" (600 mm)
Type : Signal wire connect between modules

PENDANT



SKU : LFT-DI-15
Type : Pendant Kit for power connection (without power cord)





SKU : LFT-DI-15-V
Type : Pendant Kit for power connection (without power cord and single wire)



SKU : LFT-DI-16
Type : Pendant kit



TRIM



2PCS


SKU : LFT-NC-05
Type : Trim end cap

TRIMLESS



2PCS

SKU : LFT-NC-03
Type : End cap



2PCS

SKU : LFT-NR-01
Type : Trimless bracket