

# LINEAR FIXTURE TRACK - SPOT SPEC SHEET

LFT60-S



The LFT60-S Series is a range of spotlight solution ideal for galleries or focus lighting on specific subject or wall. With its wide range of track mounting options, the LFT60-S are compatible with recessed, surface and suspended pendant mounting. The series is equipped with dimming and standard color temperature of 3000K. With the versatility of 355-degree rotation and 90-degree tilt angle, the LFT60-S Series can direct its light to almost any direction. The LFT60-S1-2 in particular has two light engines with a power rating of 17 Watts and has three beam angles options.




LFT60-S1-2

## SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	17W
CONTROL	0/1-10 V Dimmable
FLUX	1147 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Copper
MOUNTING	Track mounted
PROJECTION	20°, 25°, 36°
ROTATION	355°
TILT ANGLE	90°

<b>V</b>	<b>120 VAC</b> Operating Voltage
<b>W</b>	<b>17W</b> Rated Power

## DIMENSIONS

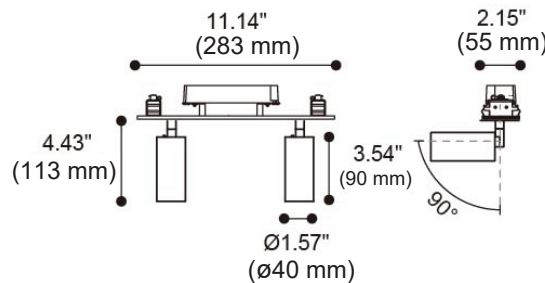


## ORDERING CODE

SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT60	S1-2 - Spot 1-2	17W - 17 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K CTXX - CUSTOM	20D - 20 Degrees 25D - 25 Degrees 36D - 36 Degrees	RM - Recessed Mount SM - Surface Mount PM - Pendant Mount	BK - Black WH - White	BK - Black WH - White CO - Copper


ACCESSORIES	
ACSN-11	Long Baffle
ACSG-9	Striped Glass
ACWG-10	Woven Glass
ACDS-8	Diffusion Sheet
ACHO-13	Honeycomb Louver

Sample: LFT 60-S1-2 - 17W - AC - 90 - CT30 - 20D - SM - BK - CO - ACHO-13

## PHOTOMETRIC DATA



BEAM ANGLE: 20°  
MAX. I: 5545 cd.  
FLUX: 1147 lm






BEAM ANGLE: 25°  
MAX. I: 5996 cd.  
FLUX: 1147 lm

# LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES

LFT60-S


## MOUNTING OPTIONS

### TRIMLESS: LFT-T-11



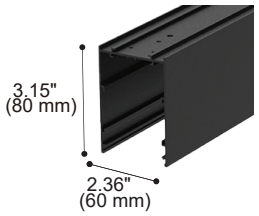


#### TRIMLESS TRACK SECTION

Article number	TYPE
LFT-T-11-44	Channel
LFT-T-11-89	Channel

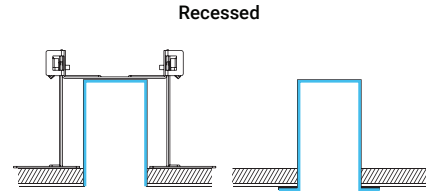


### TRIM: LFT-F-11




#### TRIMMED TRACK SECTION

Article number	TYPE
LFT-F-11-44	Channel
LFT-F-11-89	Channel

### Surface mounted





### Pendant




## ACCESSORIES

### ALL MODELS



3PCS

SKU : LFT-NC-02  
Type : Surface mounted & Pendant reinforced plate



SKU : LFT-NC-07  
Type : Light Leak-proof aluminium extrusion reinforce plate



Colours  
Black White


SKU :  
LFT-NE-02-11 11.14" (283 mm)  
LFT-NE-02-22 22.28" (566 mm)  
Type : Blank cover




SKU : LFT-SA-41  
Type : Power cord connector




SKU : LFT-PA-41-180  
71" (1800 mm)  
Type : Power cord connect to AC



SKU : LFT-SA-41-30 12" (300 mm)  
LFT-SA-41-60 24" (600 mm)  
Type : Power cord connect between modules





SKU : LFT-PSA-31-180 71" (1800 mm)  
Type : Signal wire connect to system / dimmer




SKU : LFT-SSA-31-30 12" (300 mm)  
LFT-SSA-31-60 24" (600 mm)  
Type : Signal wire connect between modules

### PENDANT



SKU : LFT-DI-15  
Type : Pendant Kit for power connection (without power cord)





SKU : LFT-DI-15-V  
Type : Pendant Kit for power connection (without power cord and single wire)



SKU : LFT-DI-16  
Type : Pendant kit



### TRIM



2PCS


SKU : LFT-NC-05  
Type : Trim end cap

### TRIMLESS



2PCS

SKU : LFT-NC-03  
Type : End cap



2PCS

SKU : LFT-NR-01  
Type : Trimless bracket