

LINEAR FIXTURE TRACK - SPOT SPEC SHEET



LFT60-S



The LFT60-S Series is a range of spotlight solution ideal for galleries or focus lighting on specific subject or wall. With its wide range of track mounting options, the LFT60-S are compatible with recessed, surface and suspended pendant mounting. The series is equipped with dimming and standard color temperature of 3000K. With the versatility of 355-degree rotation and 90-degree tilt angle, the LFT60-S Series can direct its light to almost any direction. The LFT60-S2 in particular has one light engine with a power rating of 15 Watts and has three beam angles options.




LFT60-S2

SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	15W
CONTROL	0/1-10 V Dimmable
FLUX	1259 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Copper
MOUNTING	Track mounted
PROJECTION	20°, 30°, 40°
ROTATION	355°
TILT ANGLE	90°

V	120 VAC Operating Voltage
W	15W Rated Power

DIMENSIONS

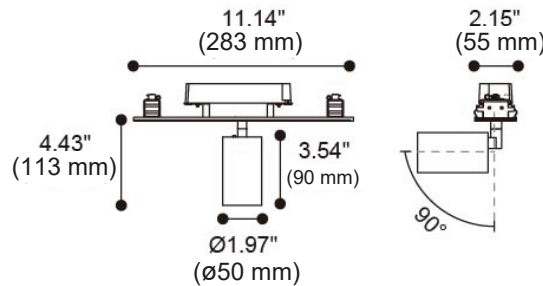

ORDERING CODE


SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT60	S2 - Spot 2	15W - 15 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K CTXX - CUSTOM	20D - 20 Degrees 30D - 30 Degrees 40D - 40 Degrees	RM - Recessed Mount SM - Surface Mount PM - Pendant Mount	BK - Black WH - White	BK - Black WH - White CO - Copper

ACCESSORIES


ACSN-11	-	Long Baffle
ACSG-9	-	Striped Glass
ACWG-10	-	Woven Glass
ACDS-8	-	Diffusion Sheet
ACHO-13	-	Honeycomb Louver

Sample: LFT 60-S2 - 15W- AC - 90 - CT30 - 20D - SM - BK - CO - ACHO-13


PHOTOMETRIC DATA



BEAM ANGLE: 20°
MAX. I: 4753 cd.
FLUX: 1259 lm



BEAM ANGLE: 30°
MAX. I: 3325 cd.
FLUX: 1259 lm






BEAM ANGLE: 40°
MAX. I: 1999 cd.
FLUX: 1259 lm

LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES


LFT60-S

MOUNTING OPTIONS




TRIMLESS: LFT-T-11




TRIMLESS TRACK SECTION	
Article number	TYPE
LFT-T-11-44	Channel
LFT-T-11-89	Channel

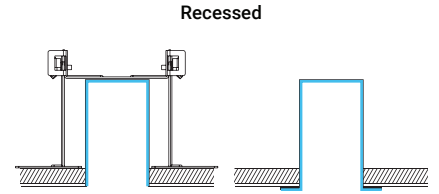

TRIM: LFT-F-11





TRIMMED TRACK SECTION	
Article number	TYPE
LFT-F-11-44	Channel
LFT-F-11-89	Channel

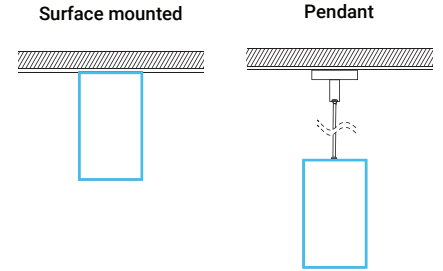


ACCESSORIES

ALL MODELS



3PCS

SKU : LFT-NC-02
Type : Surface mounted & Pendant reinforced plate



SKU : LFT-NC-07
Type : Light Leak-proof aluminium extrusion reinforce plate



Colours
Black White

SKU : LFT-NE-02-11 11.14\" (283 mm)
LFT-NE-02-22 22.28\" (566 mm)
Type : Blank cover




SKU : LFT-SA-41
Type : Power cord connector




SKU : LFT-PA-41-180 71\" (1800 mm)
Type : Power cord connect to AC



SKU : LFT-SA-41-30 12\" (300 mm)
LFT-SA-41-60 24\" (600 mm)
Type : Power cord connect between modules




SKU : LFT-PSA-31-180 71\" (1800 mm)
Type : Signal wire connect to system / dimmer




SKU : LFT-SSA-31-30 12\" (300 mm)
LFT-SSA-31-60 24\" (600 mm)
Type : Signal wire connect between modules

PENDANT



SKU : LFT-DI-15
Type : Pendant Kit for power connection (without power cord)





SKU : LFT-DI-15-V
Type : Pendant Kit for power connection (without power cord and single wire)



SKU : LFT-DI-16
Type : Pendant kit



TRIM



2PCS


SKU : LFT-NC-05
Type : Trim end cap

TRIMLESS



2PCS

SKU : LFT-NC-03
Type : End cap



2PCS

SKU : LFT-NR-01
Type : Trimless bracket