

LINEAR FIXTURE TRACK - SPOT SPEC SHEET



LFT60-S



The LFT60-S Series is a range of spotlight solution ideal for galleries or focus lighting on specific subject or wall. With its wide range of track mounting options, the LFT60-S are compatible with recessed, surface and suspended pendant mounting. The series is equipped with dimming and standard color temperature of 3000K. With the versatility of 355-degree rotation and 90-degree tilt angle, the LFT60-S Series can direct its light to almost any direction. The LFT60-S2-2 in particular has two light engines with a power rating of 30 Watts and has three beam angles options.




LFT60-S2-2

SPECIFICATIONS

OPERATING VOLTAGE	120 VAC
RATED POWER	30W
CONTROL	0/1-10 V Dimmable
FLUX	2376 lm
CRI	>90
BODY FINISH	Black, White
BAFFLE FINISH	Black, White, Copper
MOUNTING	Track mounted
PROJECTION	20°, 30°, 40°
ROTATION	355°
TILT ANGLE	90°

- V** 120 VAC
Operating Voltage
- W** 30W
Rated Power

DIMENSIONS

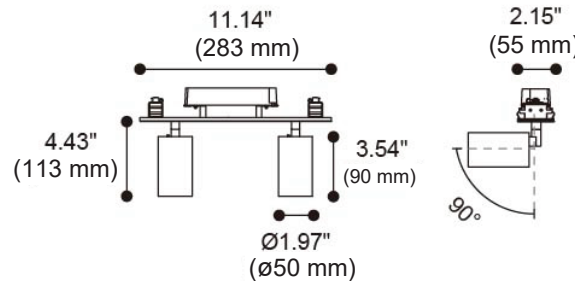


ORDERING CODE

SERIES	TYPE	POWER	VOLTAGE	CRI	COLOR TEMPERATURE	PROJECTION	TRACK MOUNTING	BODY FINISH	BAFFLE FINISH
LFT60	S2-2 - Spot 2-2	30W - 30 WATTS	AC - 120VAC	90 - CRI90	CT30 - 3000K	20D - 20 Degrees	RM - Recessed Mount	BK - Black	BK - Black
					CTXX - CUSTOM	30D - 30 Degrees	SM - Surface Mount	WH - White	WH - White
						40D - 40 Degrees	PM - Pendant Mount		CO - Copper


ACCESSORIES	
ACSN-11	Long Baffle
ACSG-9	Striped Glass
ACWG-10	Woven Glass
ACDS-8	Diffusion Sheet
ACHO-13	Honeycomb Louver

Sample: LFT 60-S2-2 - 30W- AC - 90 - CT30 - 20D - SM - BK - CO - ACHO-13


PHOTOMETRIC DATA



BEAM ANGLE: 20°
MAX. I: 12510 cd.
FLUX: 2376 lm



BEAM ANGLE: 30°
MAX. I: 8971 cd.
FLUX: 2376 lm






BEAM ANGLE: 40°
MAX. I: 5425 cd.
FLUX: 2376 lm

LINEAR FIXTURE TRACK - MOUNTING & ACCESSORIES


LFT60-S

MOUNTING OPTIONS




TRIMLESS: LFT-T-11

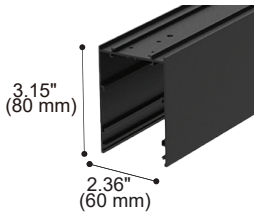


TRIMLESS TRACK SECTION	
Article number	TYPE
LFT-T-11-44	Channel
LFT-T-11-89	Channel

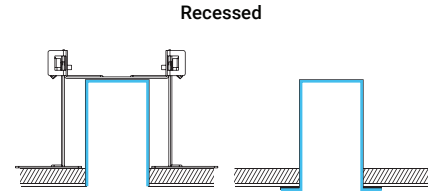

TRIM: LFT-F-11

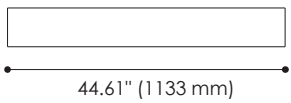
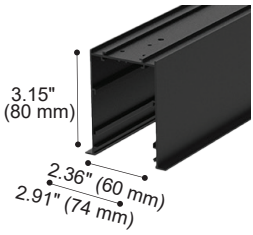


TRIMMED TRACK SECTION	
Article number	TYPE
LFT-F-11-44	Channel
LFT-F-11-89	Channel

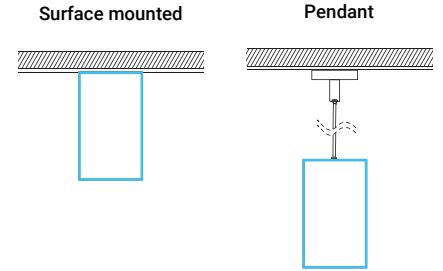


ACCESSORIES

ALL MODELS

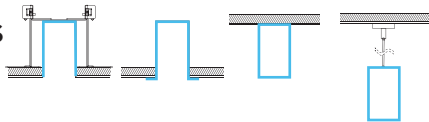

3PCS

SKU : LFT-NC-02
Type : Surface mounted & Pendant reinforced plate



SKU : LFT-NC-07
Type : Light Leak-proof aluminium extrusion reinforce plate



Colours
Black White

SKU :
LFT-NE-02-11 11.14" (283 mm)
LFT-NE-02-22 22.28" (566 mm)
Type : Blank cover




SKU : LFT-SA-41
Type : Power cord connector




SKU : LFT-PA-41-180
71" (1800 mm)
Type : Power cord connect to AC



SKU : LFT-SA-41-30 12" (300 mm)
LFT-SA-41-60 24" (600 mm)
Type : Power cord connect between modules





SKU : LFT-PSA-31-180 71" (1800 mm)
Type : Signal wire connect to system / dimmer




SKU : LFT-SSA-31-30 12" (300 mm)
LFT-SSA-31-60 24" (600 mm)
Type : Signal wire connect between modules

PENDANT



SKU : LFT-DI-15
Type : Pendant Kit for power connection (without power cord)





SKU : LFT-DI-15-V
Type : Pendant Kit for power connection (without power cord and single wire)



SKU : LFT-DI-16
Type : Pendant kit



TRIM



2PCS


SKU : LFT-NC-05
Type : Trim end cap

TRIMLESS



2PCS

SKU : LFT-NC-03
Type : End cap



2PCS

SKU : LFT-NR-01
Type : Trimless bracket