

UNDER WATER SERIES

UW-RL-64



YYZ UW series are refined underwater luminaires available in various size, wattage, multiple beam angles to suit varied project requirements. Constructed in 316L grade stainless steel body with high efficiency lens optic and hermetically sealed to IP68 through tempered glass diffuser. Application areas includes all under water, swimming pools etc.

FEATURES

LEDs	1 LED
FINISH	Stainless steel 316L
WORKING VOLTAGE	12V DC, 24V DC
RATED POWER	3W, 5W
BEAM ANGLE	6°, 15°, 18°, 20°, 24°, 25°, 35°, 38°, 40°, 60°
MOUNTING	Floor, Wall recessed
LENS	Tempered glass T=8mm
DIMENSIONS	Ø64 x 74mm(H)
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
BODY COLOR	Stainless steel
CONTROL	On/Off, Triac, Dali, 1-10V
MAXIMUM RECESSING DEPTH	3 meter



LUMINUS/CREE
LED Quality


12V DC/24V DC
Working Voltage

3W/5W
Rated power

ELECTRICAL DATA

SUPPLY VOLTAGE	12V DC, 24V DC
COLORS	2200K, 2700K, 3000K, 4000K, 5000K, 6500K
CRI	80, 90

DIMENSION

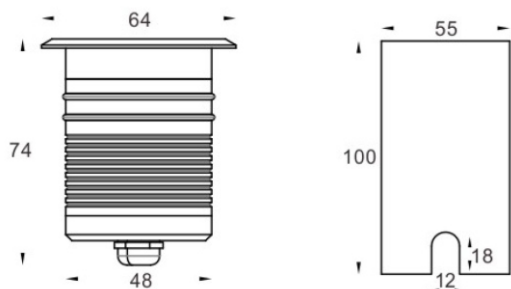

ORDERING LOGIC

PRODUCT	WATTAGE	OPTIC	COLOR TEMPERATURE	VOLTAGE	BODY COLOR	CRI	CUSTOM
UW-RL-64	3 - 3W	6 -	6° (CT22)	2200K	12 - 12VDC	SS - Stainless steel	80 - 80
		15 -	15° (CT27)	2700K			
	5 - 5W	18 -	18° (CT30)	3000K	24 - 24VDC	SS - Stainless steel	80 - 80
		20 -	20° (CT40)	4000K			
		24 -	24° (CT50)	5000K			
		25 -	25° (CT65)	6500K			
		35 -	35°				
		38 -	38°				
		40 -	40°				
		60 -	60°				

Sample: UW-RL-64 - 3 - 6 - CT 30 - 24 - SS - 08 - XX