

INDOOR LFX SOB SPEC SHEET

LFX SOB-I-5-CTXX-2835-Z3-240-28V-CV-10-H-1-HT-RMTLWLS

Mono **3M TAPE** **IP20** **CE** **5W/mtr, 10W/mtr**

The YYZ LFX SOB series (SMD on Board) represents the latest indoor-rated version of flexible linear LED light strips. This innovative product offers a straightforward and efficient solution suitable for a wide array of lighting applications. It delivers a crisp, soft, and smooth line of strip lighting in a single-color format, ensuring superior lighting consistency. Notably, it eliminates any visible LED light dots, surpassing the performance of existing SMD linear LED strip lights. The newest generation SOB Strip features a continuous long PCB board devoid of solder joints, resulting in an elegant and immaculate appearance. Its design makes it particularly well-suited for indirect accent lighting, cove lighting, steps and stairwells, furniture illumination, kitchen and cabinet lighting, and various other task and specialty applications.



FEATURES

LIGHT SOURCE	2835 LED
LED QUANTITY	240Leds / mtr
FINISH	White PCB
WORKING VOLTAGE	24 Volts
RATED POWER	5W, 10W / mtr
RADIANCE ANGLE	130°
LAMP LIFE	50,000 hrs
MOUNTING	3M Tape on the back
CONNECTION	Hardwired tails
CUTTING INCREMENTS	Every 66.67 mm
DIMENSIONS	10mm X 5000mm(PCB)
MAX DAISY RUN	20mtr
CONTROL	On/Off, 1-10V, Dali

PHILIPS/LUMILEDS
LED Quality

24VOLTS
Working Voltage

5W / mtr, 10W/mtr
Rated power

3M Tape on the back
Mounting


ELECTRICAL DATA

SUPPLY VOLTAGE	24 Volts
COLORS	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	90
LUMEN	110lm/w @ (5W), 103lm/W @ (10W)

LUMEN CHART

CCT	5W	10W
2700K	550lm/m	1035lm/m
3000K	550lm/m	1035lm/m
4000K	575lm/m	1050lm/m
6500K	595lm/m	1075lm/m

DIMENSIONS

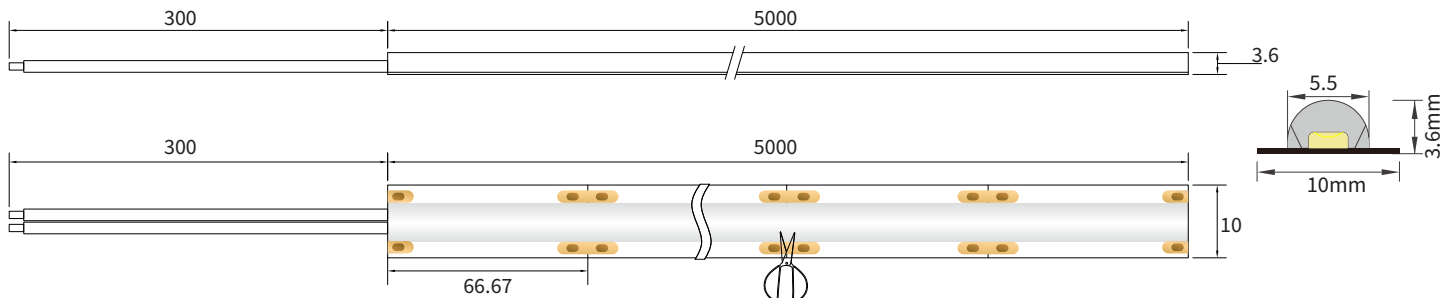

INDOOR LFX SOB SPEC SHEET

LFX SOB-I-5-CTXX-2835-Z3-240-28V-CV-10-H-1-HT-RMTLWL5

ORDERING LOGIC

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	PCB	CRI	NO OF LED ROWS	CONNECTION
LFX SOB	I - INDOOR (IP20)	5 - 5W 10 - 10W	(CT27) 2700K (CT30) 3000K (CT35) 3500K (CT40) 4000K (CT50) 5000K (CT65) 6500K	2835	Z3	240 - 240 LEDs/mtr	24 - 24V	CV-Constant voltage	10 - 10mm	H - HIGH (90)	1	HT - Hardwired Tail IC - Indoor Connector

MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL
R - Regular	M - Mono	T - Top	L - Low	W - White	L5 - 5mtr

Sample: LFX SOB -I-5-CT27-2835-Z3-240-24-CV-10-H-1-HT-RMTLWL5

SOB SMOOTH LINE STRIP





INDOOR LFX SOB SPEC SHEET

LFX SOB-I-5-CTXX-2835-Z3-240-28V-CV-10-H-1-HT-RMTLWLS



No solder joints on PCB board, Appearance looks more elegant and clean.

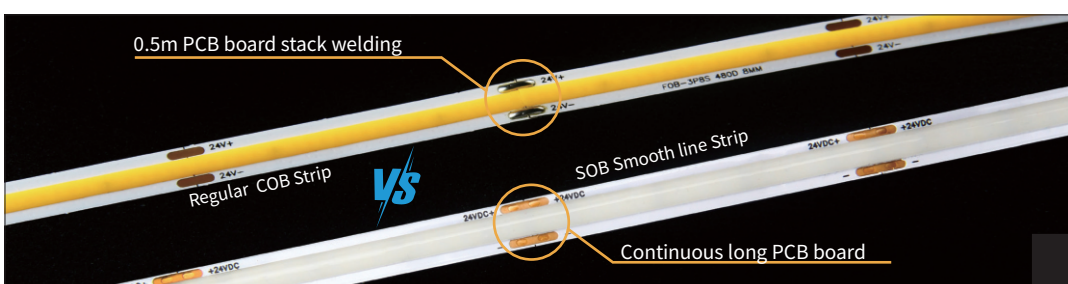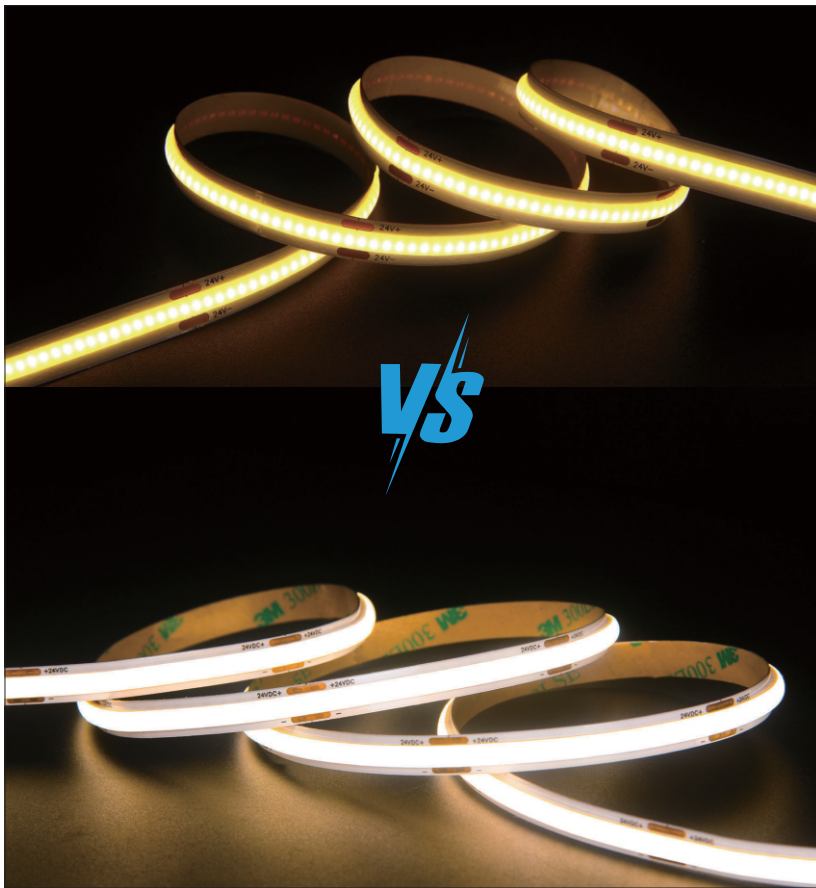

INDOOR LFX SOB SPEC SHEET

LFX SOB-I-5-CTXX-2835-Z3-240-28V-CV-10-H-1-HT-RMTLWLS

AVAILABLE COLORS

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K
- 6500K



APPLICATION IMAGE

