

INDOOR LED STRIP DIM2 WARM FLEX SERIES

LFX-I-5-CTWD-2835-Z9-168-24-CV-10-H-1-HT-R-M-T-L-W-L05



3M TAPE
IP20
NON-WATER PROOF



CE 5W/10W /14W / 20W

Our LFX series flexible linear LED light strips is a simple, effective solution for a wide range of lighting applications where crisp, single color light is desired. Ideal for indirect accent lighting, as well as a store fixtures, display cases, steps and stairwells, furniture, kitchen and cabinet lighting, along with other task and specialty applications.

FEATURES

LIGHT SOURCE	2835 LED
LED QUANTITY	168 LEDs / m
FINISH	White PCB
WORKING VOLTAGE	24 V DC
RATED CURRENT	200mA
RATED POWER	5W/m, 10W/m, 14W/m, 20W/m
RADIANCE ANGLE	120°
LAMP LIFE	50,000 Hrs
MOUNTING	3M Tape on the back
CONNECTION	Hardwired tails
CUTTING INCREMENTS	Every 83.33 mm
DIMENSIONS	10mm X 5000mm(PCB)
MAX DAISY RUN	5 m




- CREE**
LED Quality
- 24V DC**
Working Voltage
- 5W, 10W, 14W, 20W/ m**
Rated power
- 3M Tape on the back**
Mounting

ELECTRICAL DATA

SUPPLY VOLTAGE	24 V DC
CONTROL	On/Off, Dimmable
COLORS	1800-3000K
LUMEN	5W/mtr – 29lm (1800K), 550lm (3000K) 10W/mtr – 58lm (1800K), 1100lm (3000K) 14W/mtr – 80lm (1800K), 1455lm (3000K) 20W/mtr – 100lm (1800K), 1750lm (3000K)

DIMENSIONS

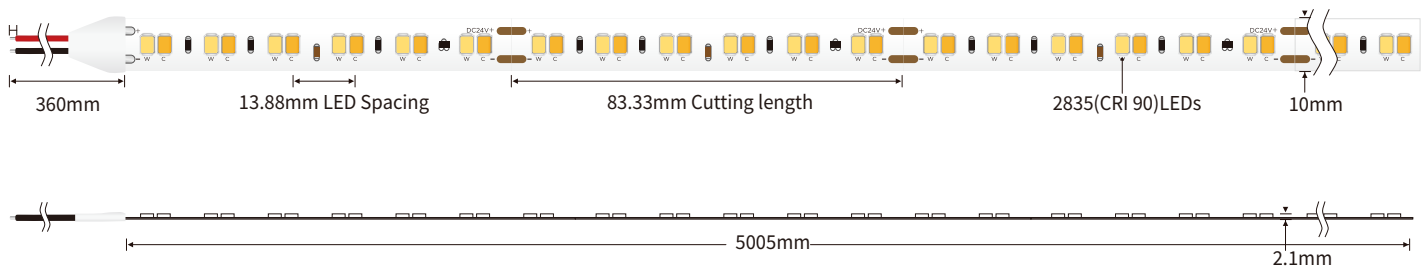

ORDERING LOGIC

PRODUCT SERIES	TYPE	POWER	COLOR TEMPERATURE	LED TYPE	BIN	NO. OF LED	VOLTAGE	CIRCUIT	WIDTH	CRI	NO OF LED ROWS	CONNECTION
LFX	I - Indoor (IP20)	5 - 5W 10 - 10W 14 - 14W 20 - 20W	(CTWD) 1800-3000K	2835	Z9	168 - 168 LEDs/mtr	24-24V	CV-Constant voltage	10 - 10mm	H - High (90)	1	HT - Hardwired Tail IC - Indoor Connector
MODEL	COLOR CONTROL	LIGHT EMITTING DIRECTION	LED POWER	PCB COLOR	LENGTH PER REEL							
R - Regular	M - Mono	T - Top	L - Low	W - White	L05 - 5mtr							

Sample: LFX-I-5-CTWD-2835-Z9-168-24-CV-10-H-1-HT-R-M-T-L-W-L05