

VERTEX 24 MONO SPEC SHEET



VTX-24



YYZ Vertex series is a new surface mounted frameless slim shape weatherproof luminaire in soft and high LED or mono version specially designed for facade and in unique structure design shape. This series are designed to offer functional, a wide range of lighting solutions and dramatic highlighting of the architectural facades of different buildings, malls through the linear curved design with superior finishing as well highest efficiency with a long service life.



FEATURES

FINISH	6063 High density extruded aluminum
WORKING VOLTAGE	24VDC, 48VDC
RATED POWER	15W
BEAM ANGLE	120°
AVAILABLE LENGTH	300mm, 500mm, 1000mm
MOUNTING	Surface mounting
OPTIC	Square Acrylic Diffuser, Round Acrylic Diffuser
DIMENSIONS	1000(L) x 24(W) x 54.4mm(H)
OPERATION TEMP	-10° C - +50° C
STORAGE TEMP	-30° C - +60° C
LAMP LIFE	50,000 hrs
BODY COLOR	Black, Grey, White
CONTROL	On/Off

CREE / NICHIA / EPISTAR / OSRAM
LED Quality


24VDC, 48VDC
Working Voltage

15W
Rated power


ELECTRICAL DATA

SUPPLY VOLTAGE	120-277 VAC 50/60Hz
COLORS	2700K, 3000K, 4000K, 5000K, 5700K
CRI	80
LUMEN	27~32lm/W

DIMENSION

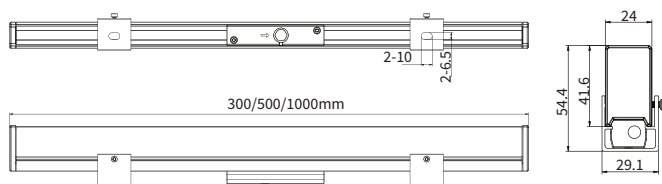

VTX 24 SM FLAT BRACKET

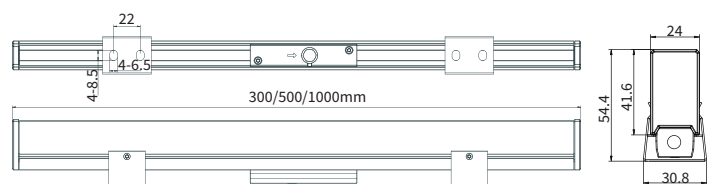

VTX 24 SM CLIP BRACKET

ORDERING LOGIC

PRODUCT	DIFFUSER	POWER	OPTIC	COLOR TEMPERATURE	VOLTAGE	FIXTURE LENGTH	CONTROL	BODY COLOR	BRACKET TYPE	
VTX-24	F - Flat	15 - 15W	120 - 120°	(CT27)	2700K	24 - 24V DC	30 - 300mm	SW - On/Off	BK - Black	FB - Flat Bracket
				(CT30)	3000K	48 - 48V DC	50 - 500mm		GR - Grey	CB - Clip Bracket
	R - Round	(CT40)	4000K	100 - 1000mm	WH - White					
		(CT50)	5000K							
		(CT57)	5700K							

Sample: VTX-24-F-15-120-CT27-24-30-SW-BK-FB