

LFC GRAZER OUTDOOR SPEC SHEET



LFC-G-0



4.8W / ft
7.2W / ft
9.6W / ft
12W / ft

The LFC Series Grazers are a simple, yet certain solution for outdoor wall-washing and grazing applications. They project a consistently crisp wash of light to accentuate wall textures. With precise beam control and power options, chances are that you'll find the "sweet spot" for the application.

FEATURES

OPERATING VOLTAGES	105–277 V AC / 24V DC
OPERATING TEMPERATURE	-40°C to + 50°C
LIGHT SOURCE	Top quality surface mount LED with variable drive current
COLOR RANGE	Single Color Operation / Custom Color Operation
BEAM ANGLE	10°, 18°, 24°, 32°, 43°, 50°, 20°x40° (* = special order)
CONTROL	Switched, 0-10V Dimming [^] , DALI [^] (^ = 24V DC only)
FIXTURE CONNECTION	Circular waterproof connector
AVAILABLE IP RATING	IP67
CRI	80, 90* (* = special order)
ASHRAE COMPLIANT	4.8 W/ft version meets ASHRAE standards for linear lighting


ELECTRICAL DATA

SYSTEM WATTAGE	4.8W	7.2W	9.6W	12W
Lumen (5000 K)	510 lm	750 lm	970 lm	1200 lm
Amp/ft (@120V)	50 mA	75 mA	100 mA	120 mA
Amp/ft (@230V)	25 mA	38 mA	50 mA	60 mA
Maximum Daisy Chain @ 120 V	175 ft / 50 m	115 ft / 30 m	85 ft / 25 m	70 ft / 20 m
Maximum Daisy Chain @ 230 V	340 ft / 100 m	225 ft / 65 m	160 ft / 50 m	140 ft / 40 m

COLOR TEMPERATURE DATA

Colors	4.8W Lumens/ft	7.2W Lumens/ft	9.6W Lumens/ft	12W Lumens/ft
2200K	380 lm	560 lm	720 lm	880 lm
2700K	500 lm	720 lm	930 lm	1,150 lm
3000K	500 lm	720 lm	930 lm	1,150 lm
3500K	500 lm	720 lm	930 lm	1,150 lm
4000K	500 lm	720 lm	930 lm	1,150 lm
5000K	510 lm	750 lm	970 lm	1,200 lm
5700K	510 lm	750 lm	970 lm	1,200 lm
6000K	510 lm	750 lm	970 lm	1,200 lm
6500K	510 lm	750 lm	970 lm	1,200 lm
BLUE	120 lm	160 lm	210 lm	250 lm
GREEN	370 lm	510 lm	610 lm	710 lm
RED	200 lm	300 lm	400 lm	500 lm
AMBER	230 lm	350 lm	440 lm	520 lm

LENGTH OPTIONS

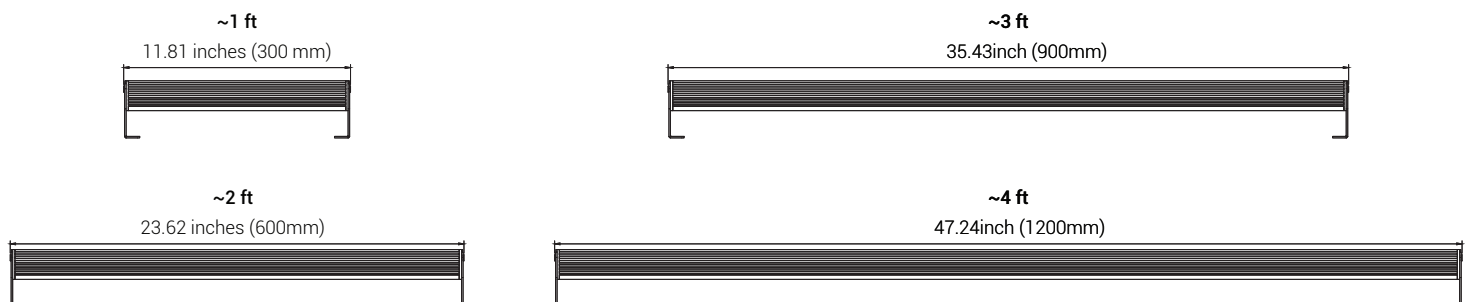

- 7 LEDs / ft**
LED Quantity
- 105-277 V AC / 24V DC**
Operating Voltage
- 4.8W / 7.2W / 9.6W / 12W**
Rated power



LFC GRAZER OUTDOOR SPEC SHEET

LFC-G-0

ORDERING CODE


SERIES	TYPE	LOCATION	OPERATING VOLTAGE	POWER PER FEET	COLOR TEMPERATURE	CONTROL	LENGTH	OPTICS	FINISH	MOUNTING	CONNECTOR	ACCESSORIES
LFC	G-Grazer	O-Outdoor	AC - 105-277V AC DC - 24V DC	4.8W - 4.8 Watts 7.2W - 7.2 Watts 9.6W - 9.6 Watts 12W - 12 Watts	CT22 - 2200K CT27 - 2700K CT30 - 3000K CT35 - 3500K CT40 - 4000K CT50 - 5000K CT57 - 5700K CT60 - 6000K CT65 - 6500K CTBL - Blue CTGR - Green CTRD - Red CTAM - Amber	SW - Switched AN - 0-10V ^A DA - DALI ^A	12 - 12inch / 300mm 24 - 24inch / 600mm 36 - 36inch / 900mm 48 - 48inch / 1200mm	10D* - 10°x10°* 18D - 18°x18° 24D - 24°x24° 32D - 32°x32° 43D - 43°x43° 50D - 50°x50° 20x40D - 20°x40°	BK - Black (Standard) WH - White	SB - Swivel Bracket (Standard) XX - Customized	IP - IP Connector	NA - None JC - Jumper Cable (Standard 24 inches)

Sample: LFC-G-O-DC-4.8W-CT24-DA-12-18D-BK- SB-IP-NA

^A Is only be available for 24V DC.


* represent special order, please contact factory for detail.

DIMENSIONS

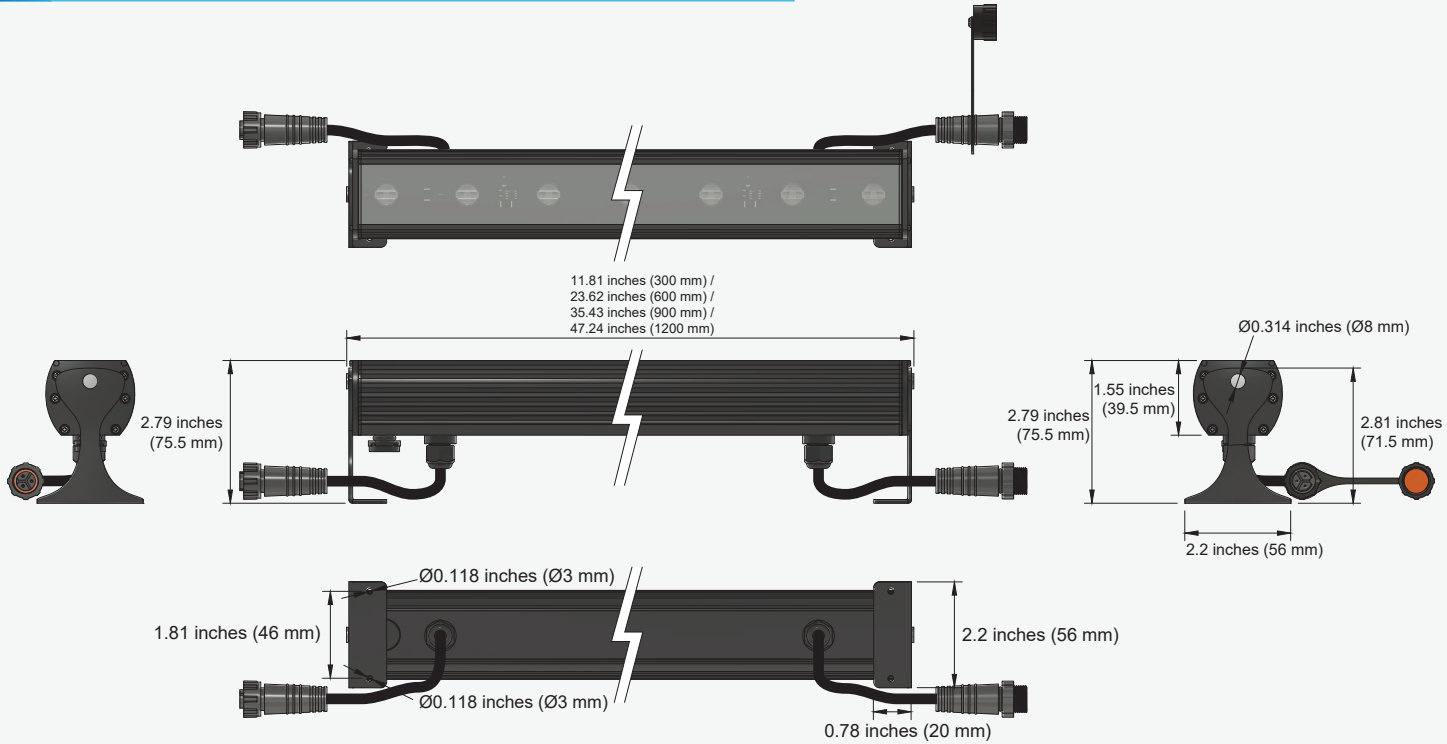


CONNECTION OPTIONS

Standard Connection



Jumper Cable (Accessories)

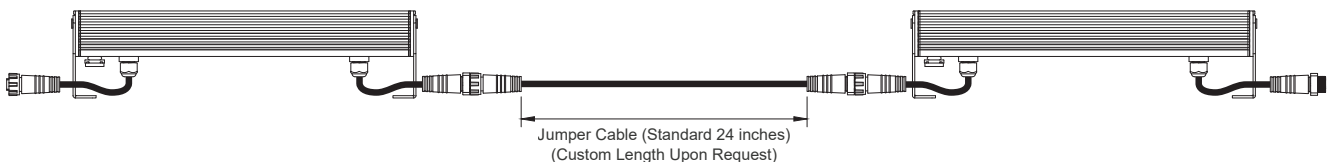

LFC GRAZER OUTDOOR SPEC SHEET

LFC-G-0



MOUNTING OPTIONS

Standard Swivel Bracket

