

VERTEX-D48

VTX-D48 RGB/RGBW



YYZ VETREX D48 series high brightness and easy installation for architectural outdoor solution, used milky diffuse cover and alum end cap, build in DMX512 module and auto-programming. The modular system available in 600mm, 900mm or 1200mm lengths and can be customized as per project's requirement Two installation way can be selected, mounting clip and adjustable brackets. All cables can be hidden into channel, IP67-rated, UV resistant and designed to withstand outdoor element, applicable for various architectural environment.



FEATURES


LED QUANTITY	96 LED(1200MM), 72 LED (900MM), 48 LED (600MM)
FINISH	MACHINED ALUMINUM
WORKING VOLTAGE	24/48V DC
RATED POWER	20W (1200MM) /15W (900MM) /10W (600 MM)
BEAM ANGLE	120°
AVAILABLE LENGTH	600MM, 900MM, 1200MM
MOUNTING	SURFACE MOUNTING
OPTIC	MILKY PC COVER
DIMENSIONS	1200MM(L) x 48MM(W)x 44.6MM(H)
OPERATION TEMP	-35° C - +50° C
STORAGE TEMP	-20° C - +60° C
LAMP LIFE	50000 HRS
BODY COLOR	BLACK, LIGHT BLUE, GRAY, GOLD, WHITE, CUSTOM
CONTROL	DMX



ELECTRICAL DATA

POWER CONSUMPTION	20/15/10W
SUPPLY VOLTAGE	24, 48 DC VOLTS
COLORS	RGB, RGBW
CRI	80+
LUMEN	25-35lm/W @ RGB

DIMENSION

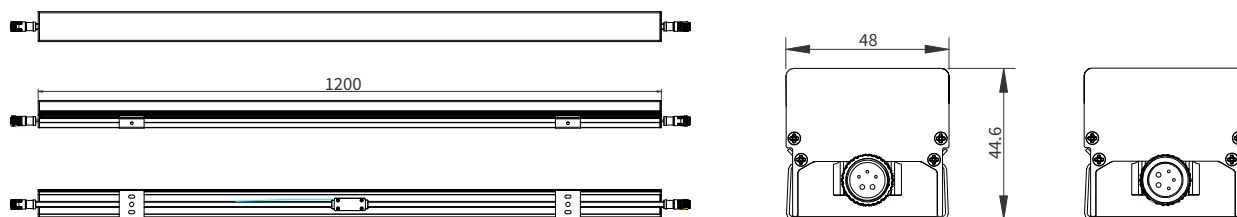

ORDERING LOGIC

PRODUCT	OPTIC	CONTROL	COLOR TEMPERATURE	VOLTAGE	FIXTURE LENGTH	BODY COLOR	CUSTOM
VTX-D48	120 - 120°	DM - DMX	(RGB) RGB	24 - 24VDC	600 - 600mm (48 LEDS)	BK - BLACK	XX
			(RGBW) RGBW	48 - 48VDC	900 - 900mm (72 LEDS)	LB - LIGHT BLUE	
					1200 - 1200mm (96 LEDS)	GR - GRAY	
					XX - CUSTOM	GL - GOLD	
						WH - WHITE	
						XX - CUSTOM	

Sample: VTX-D48 - 120 - ND - RGB - 24 - 600 - BK - XX